

NVR-A256RH-24C

Network Video Recorder



Network
Cameras

NVRs

AHD
Series

Video
Decoders

Switches

Accessories


قابلیت های کلیدی

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 256 کانال تصویری ورودی تا رزولوشن 12 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF
- دو عدد HDMI 4K و یک عدد VGA مستقل از هم
- پشتیبانی از 24 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- 4 عدد پورت شبکه 1G
- دو عدد درگاه mini SAS
- خروجی 12 ولت
- قابلیت برگرداندن تصاویر ضبط شده بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین

Specifications

IP Video Input	256-ch	SATA	24 SATA interfaces
Two-way Audio Input	1-ch, RCA	Capacity	up to 10TB for each HDD
Incoming Bandwidth	768Mbps	Extension board	4
Outgoing Bandwidth	768Mbps	miniSAS *	2 miniSAS ports
Remote Users	256	eSATA	1
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	Array Type	RAID 0/1/5/6/10/50/60
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, People counting, vehicle recognition, object left behind, object removed, SIP
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	VCA Search	Face Search, Behavior Search
Audio Output	1-ch, RCA	Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface
Synchronous Playback	16-ch	Serial Interface	1 x RS232, 1 x RS485
Corridor Mode Screen	3/4/5/7/9/10/12/16/32	USB Interface	Front panel: 2 x USB2.0, Rear panel: 2 x USB3.0
Decoding format	Ultra 265, H.265, H.264	Alarm In	24-ch
Liveview display	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Alarm Out	8-ch
Capability	5 x 4K@30, 20 x 1080P@30, 24 x 1080P@25, 40 x 960P@25, 45 x 720P@30, 54 x 720P@25, 96 x D1	Power Output	12V
		Power Supply	100 - 240V AC Power Consumption: ≤ 70 W (without HDD)
		Working Environment	-10°C ~ +50°C (+14°F ~ +122°F), Humidity ≤ 90% RH (non-condensing)
		Dimensions	533mm × 484.6mm × 175.5mm (21.0" × 19.1" × 6.9")
		Weight (without HDD)	≤ 12.5 Kg (27.56 lb)

Dimensions

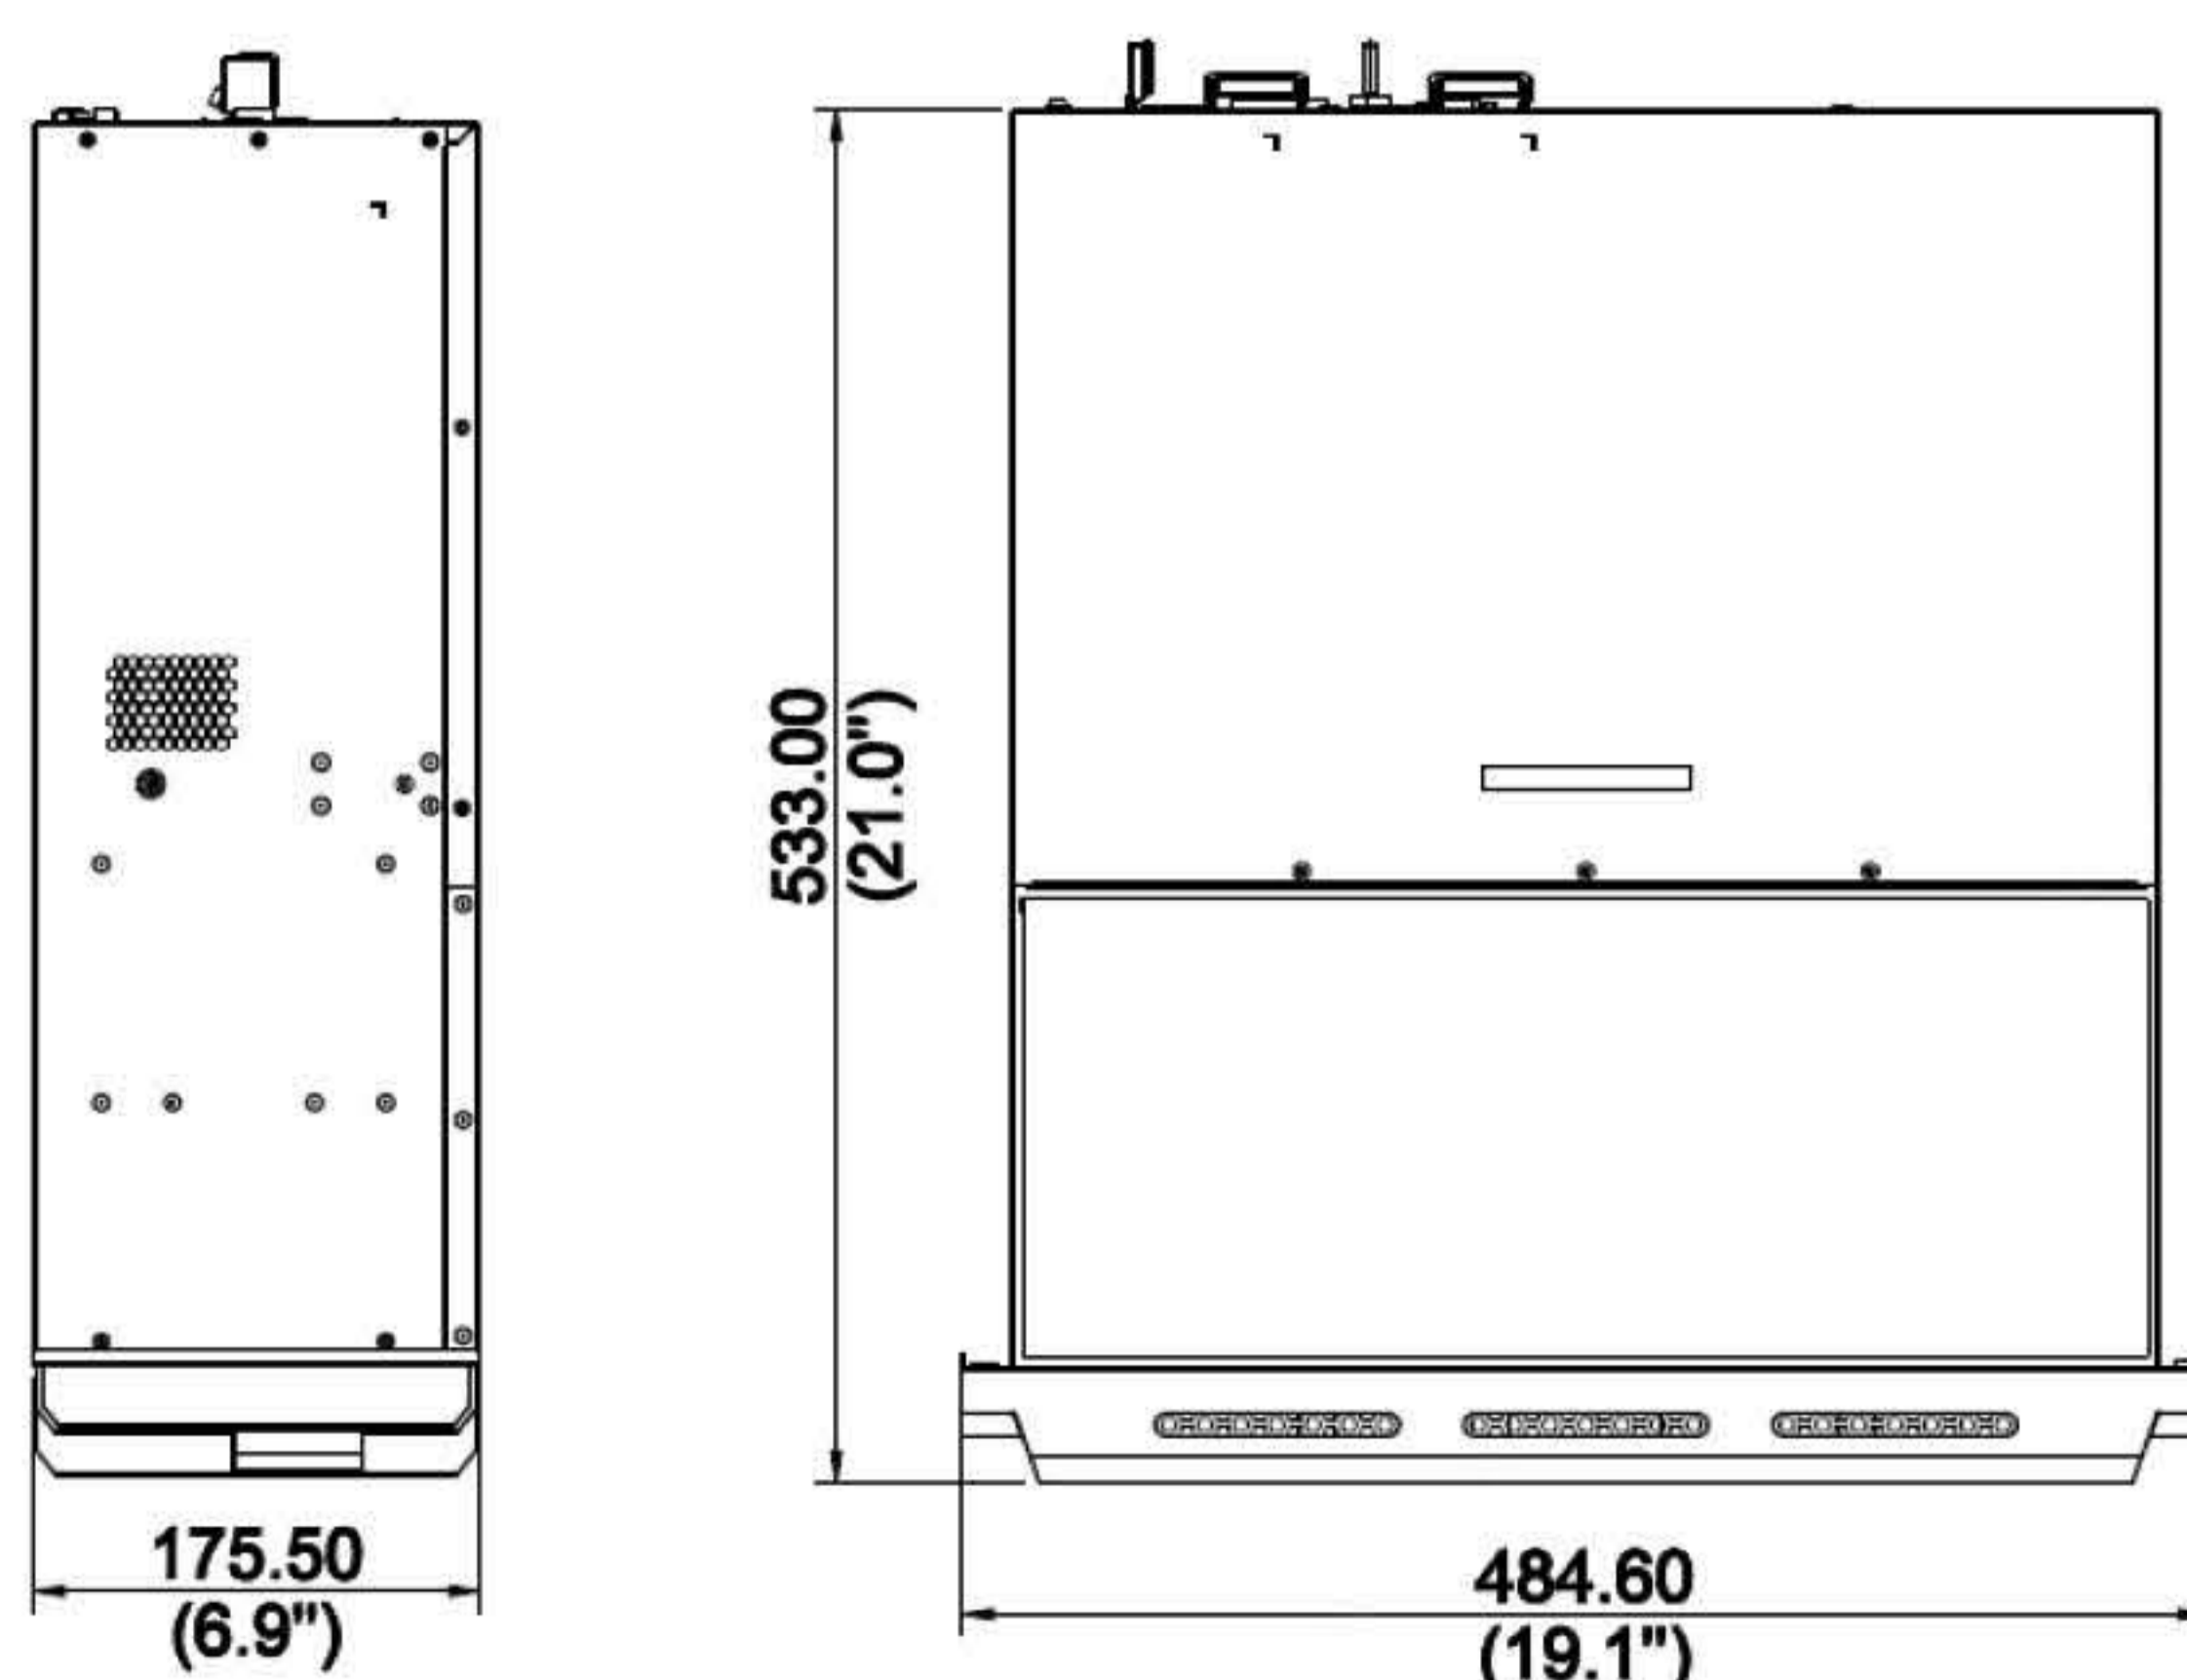

Rear Panel

