

# NVR-A64RH-16D

Network Video Recorder



## قابلیت های کلیدی

- 4 پورت شبکه 1G و 2 پورت فیبر نوری 1G
- پشتیبانی از 16 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- پشتیبانی از RAID 0,1, 5, 6, 10, 50, 60
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین
- N+1


- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 64 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF
- دو عدد HDMI 4K و یک عدد VGA
- خروجی 12 ولت

## Specifications

IP Video Input	64-ch
Two-way Audio Input	1-ch, BNC
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1/HDMI2 (HDMI audio output is not supported): 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, BNC
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Decoding format	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1
SATA	16 SATA interfaces
Capacity	up to 10TB for each HDD
eSATA	1 eSATA interface

VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, People Counting, People flow Counting, Crowd density monitoring, Scene Change detection, Auto Tracking, Face and Vehicle Recognition by IPC, Object Left, Object Removed, SIP by IPC
VCA Search	Face Search, Behavior Search
miniSAS	2 miniSAS ports
Array Type	RAID 0 / 1 / 5 / 10 / 50 / 60
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 4 x USB3.0
Alarm In	24-ch
Alarm Out	8-ch
Decoding Card (optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)
Power Output	12V
Power Supply	100 ~ 240V AC Power Consumption: ≤ 50 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Chassis	19-inch rack-mounted 3U chassis
Dimensions	482mm × 477mm × 131mm (18.8" × 19.0" × 5.1")
Weight (without HDD)	≤ 10 Kg (22.05 lb)

## Dimensions

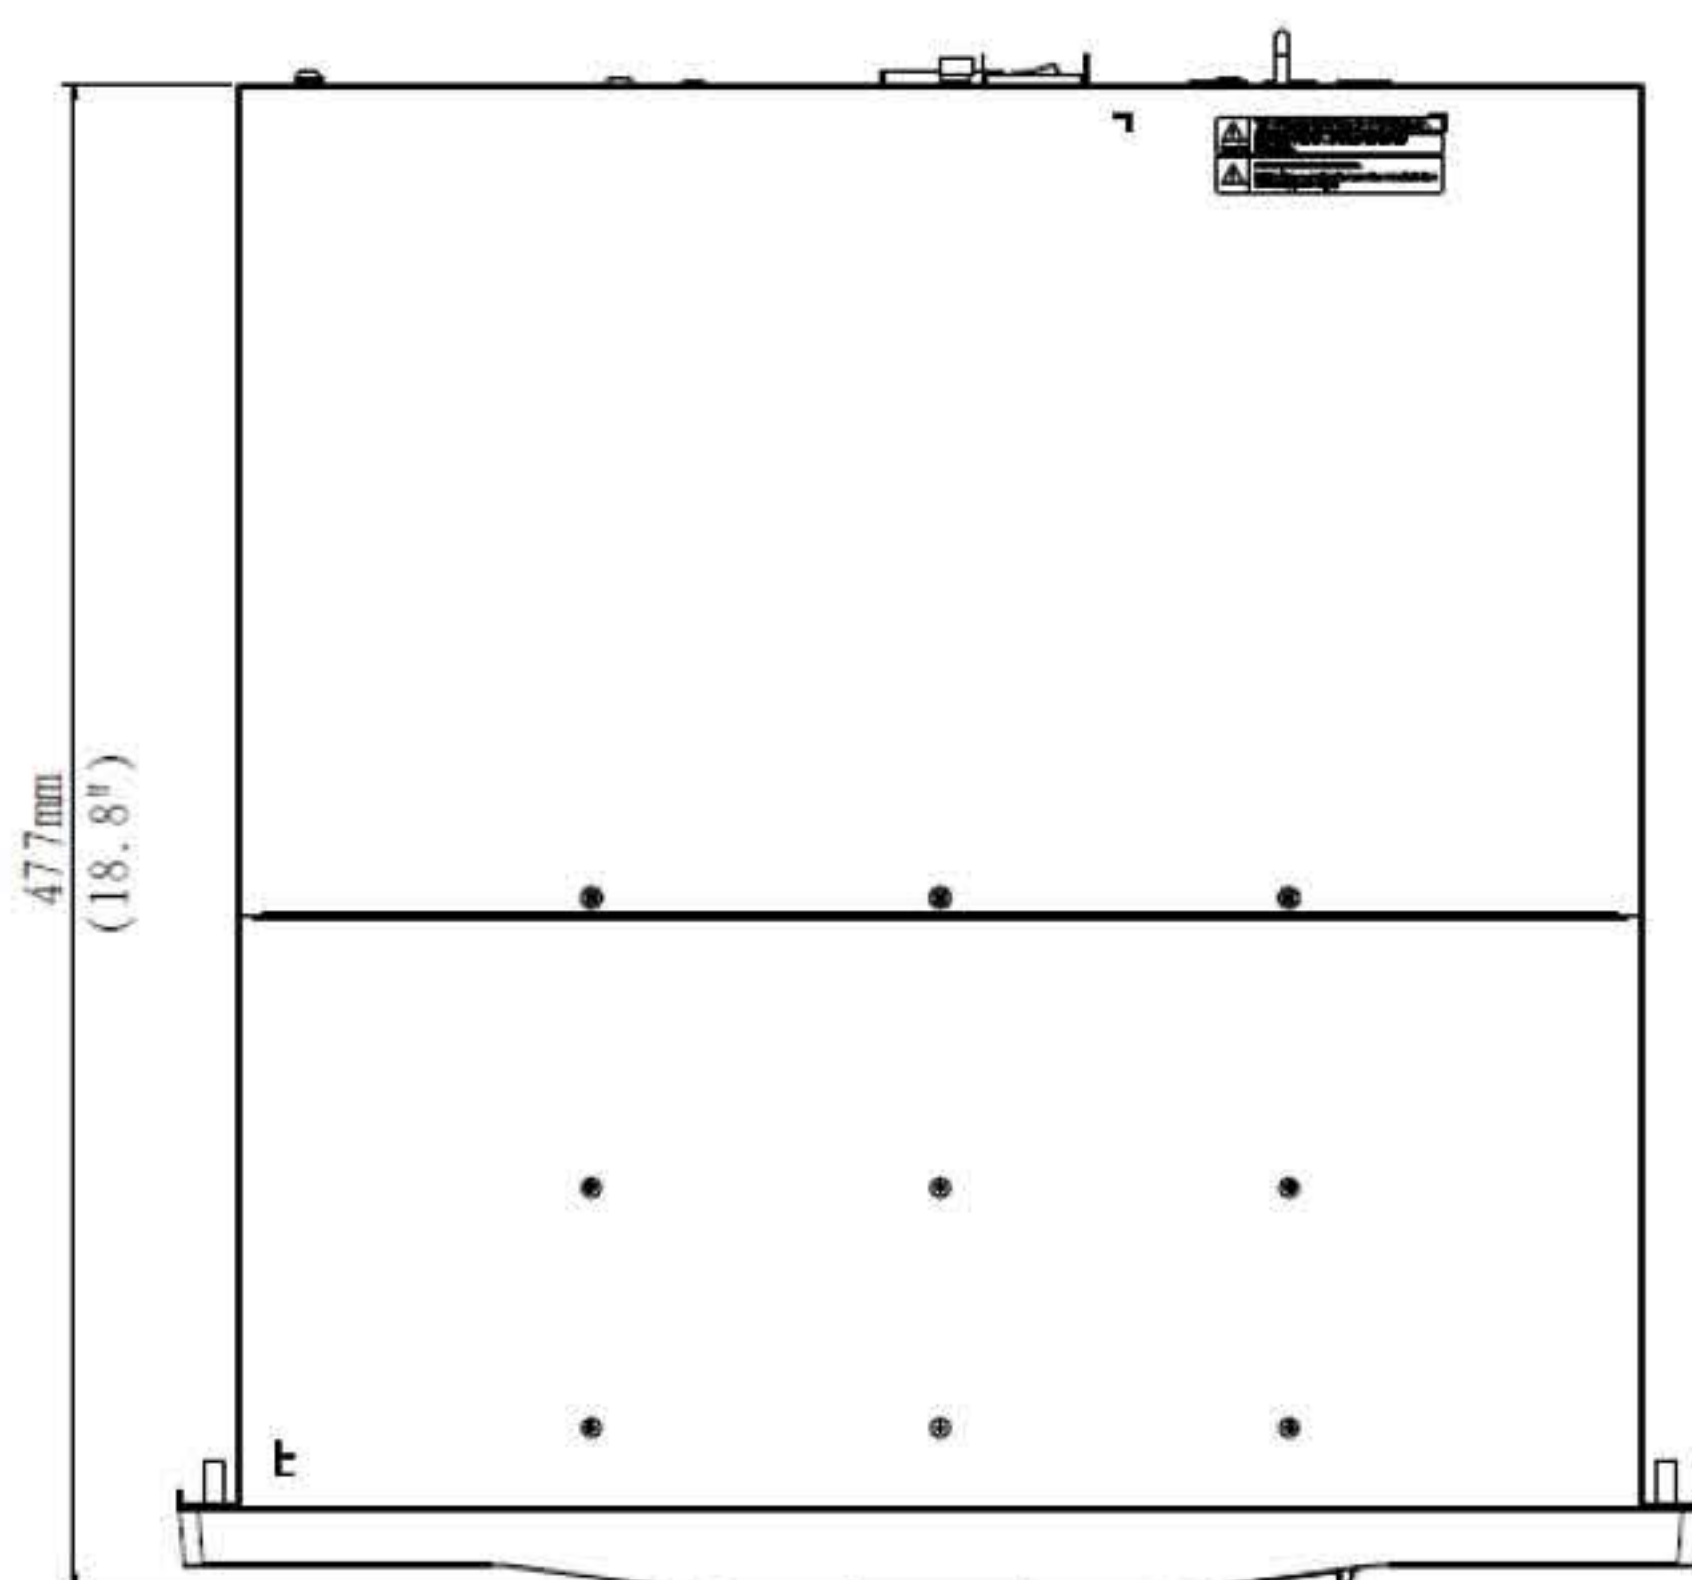

## Rear Panel

