

NVR-E04-1C

Network Video Recorder



Network
Cameras

NVRs

AHD
Series

Video
Decoders

Switches

Accessories

قابلیت های کلیدی


- یک عدد 4K HDMI و VGA همزمان
- پشتیبانی از 1 عدد هارد تا ظرفیت 6 ترابایت
- قابلیت بروزرسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 4 کانال تصویر ورودی تا رزولوشن 4K
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	4-ch	Decoding format	Ultra 265/H.265/H.264
Incoming Bandwidth	64Mbps	Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Outgoing Bandwidth	48Mbps	Capability	1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 4 x 3MP@25, 4 x 1080p@30
Remote Users	128	SATA	1 SATA interface
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SMTP, RTSP	Capacity	up to 6TB for each disk
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, SIP
	VGA: 1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	VCA Search	Face Search, Behavior Search
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
Audio Output	1-ch, 3.5mm	USB Interface	Rear panel: 2 x USB2.0
Audio Compression	G.711A, G.711U	RS232	NA
Synchronous Playback	4-ch	RS485	NA
Liveview display	1/4	Alarm In	NA
Corridor Mode Screen	3/4	Alarm Out	NA
FTP/Schedule/Event Snapshot	1-ch snapshot, up to D1 resolution	Power Supply	12V DC Power Consumption: ≤5 W (without HDD)
		Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
		Dimensions (W×D×H)	260mm × 240mm × 46mm (10.2"×9.4"×1.8")
		Weight (without HDD)	≤0.98kg (2.16 lb)

Dimensions

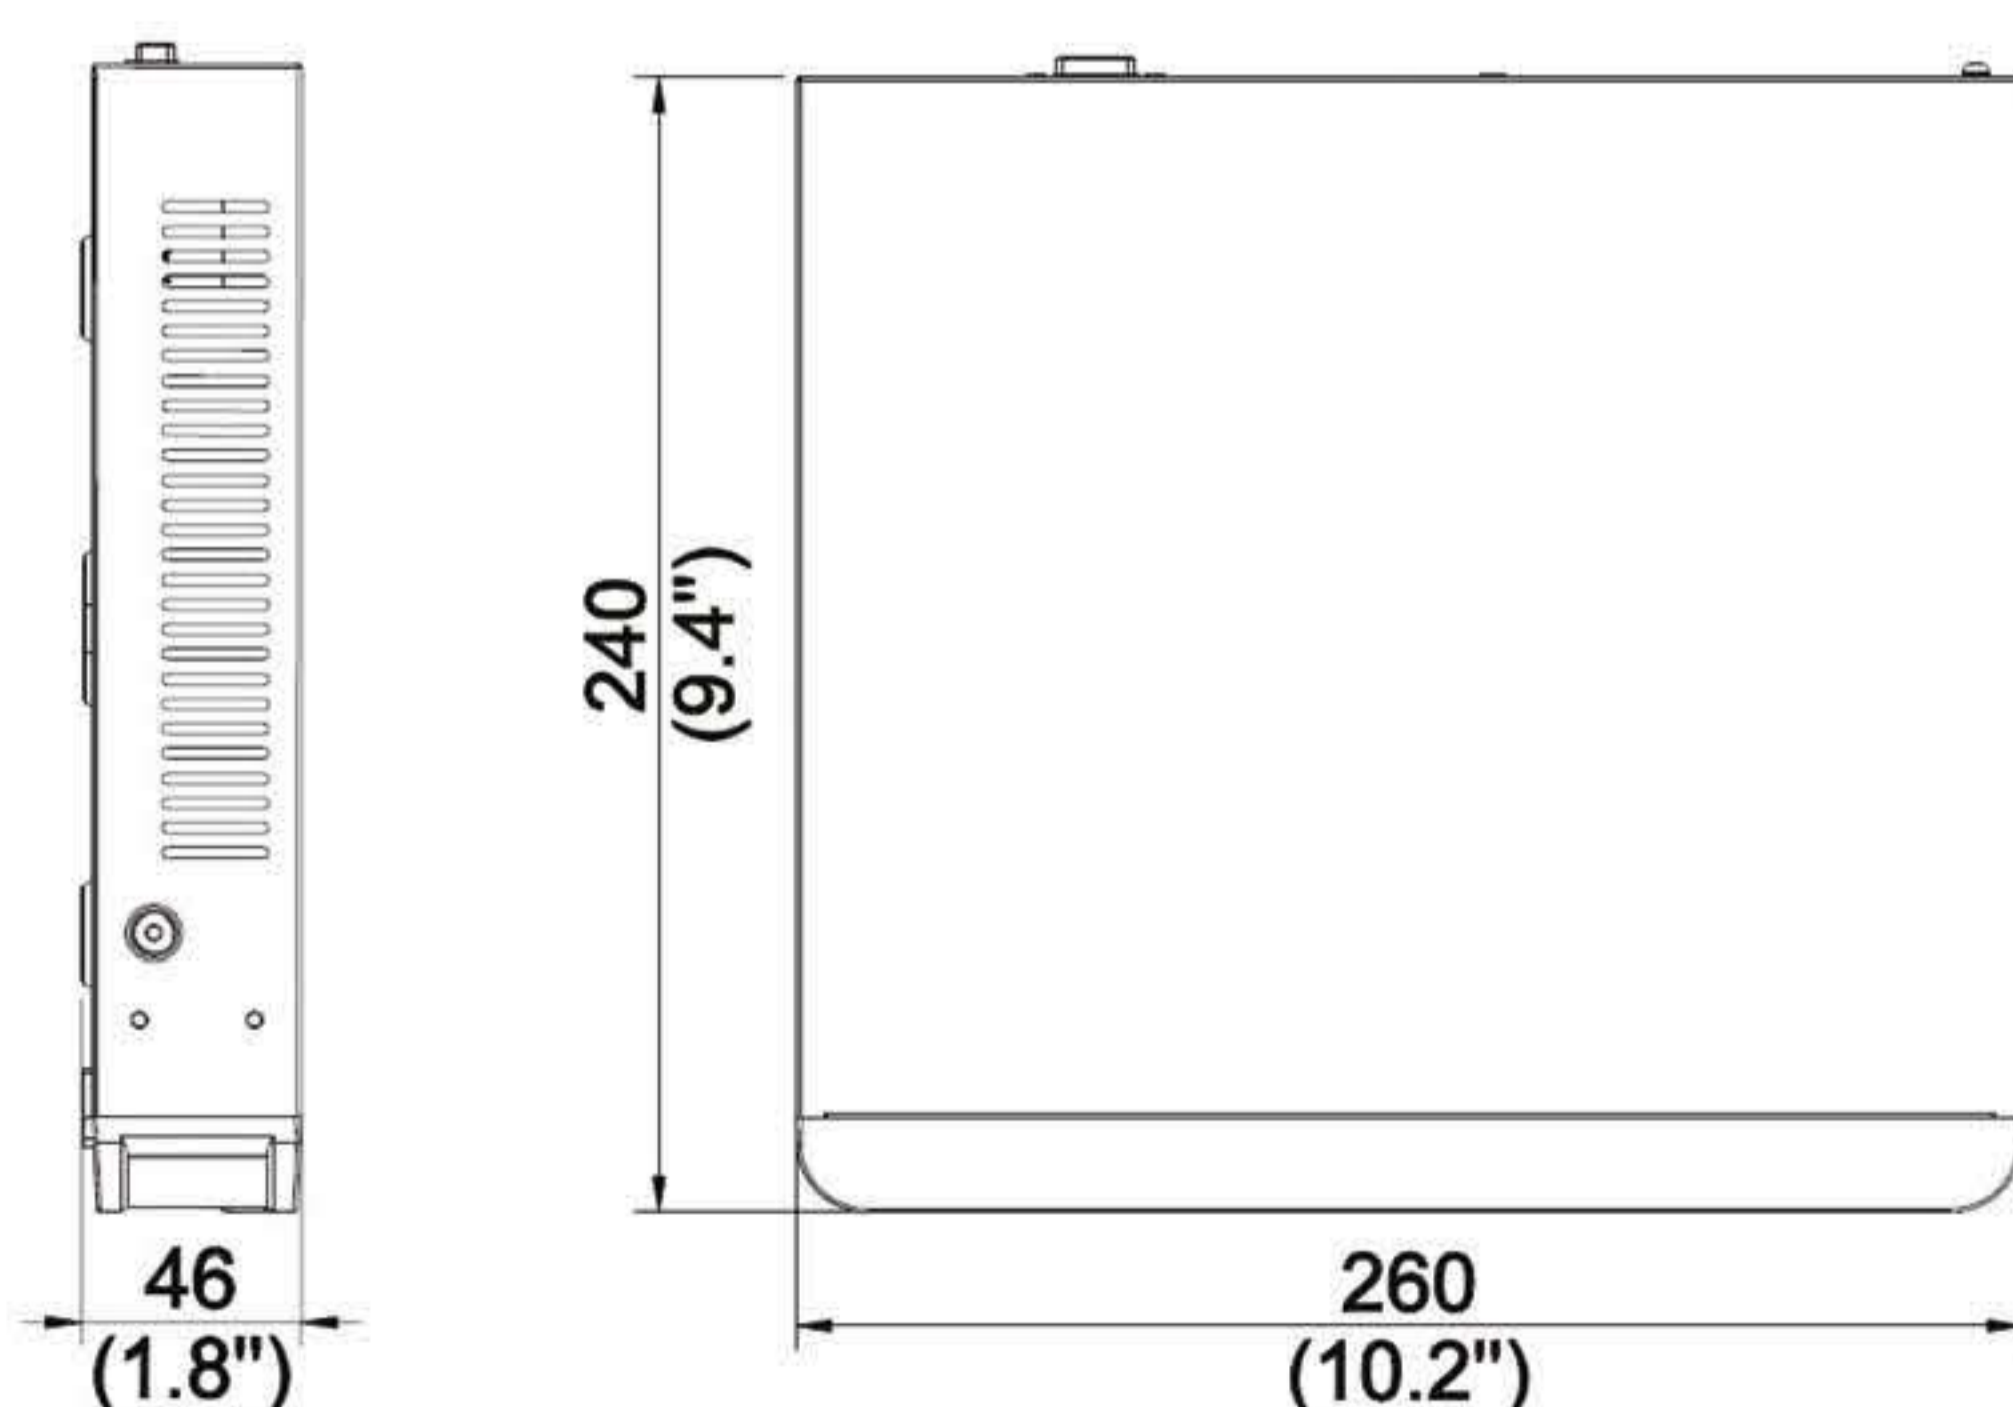

Rear Panel

