

NVR-E16-1/8A

Network Video Recorder



قابلیت های کلیدی

- خروجی همزمان 4K HDMI و VGA
- پشتیبانی از 1 عدد هارد تا 10 ترابایت
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 16 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- دارای 8 پورت POE با توان کلی 108 وات
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
Incoming Bandwidth	60Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
Decoding format	Ultra 265, H.265, H.264

Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
SATA	1 SATA interface
Capacity	up to 10TB for each disk
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
USB Interface	Rear panel: 2 x USB2.0, Front panel: 1 x USB2.0
Alarm In	4-ch
Alarm Out	1-ch
Interface	8 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 108W in total (13.5W for each)
Supported Standard	IEEE 802.3at, IEEE 802.3af
Power Supply	52V DC Power Consumption: ≤ 9 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2" × 9.4" × 1.8")
Weight (without HDD)	≤ 1.12 Kg (2.47lb)

Dimensions

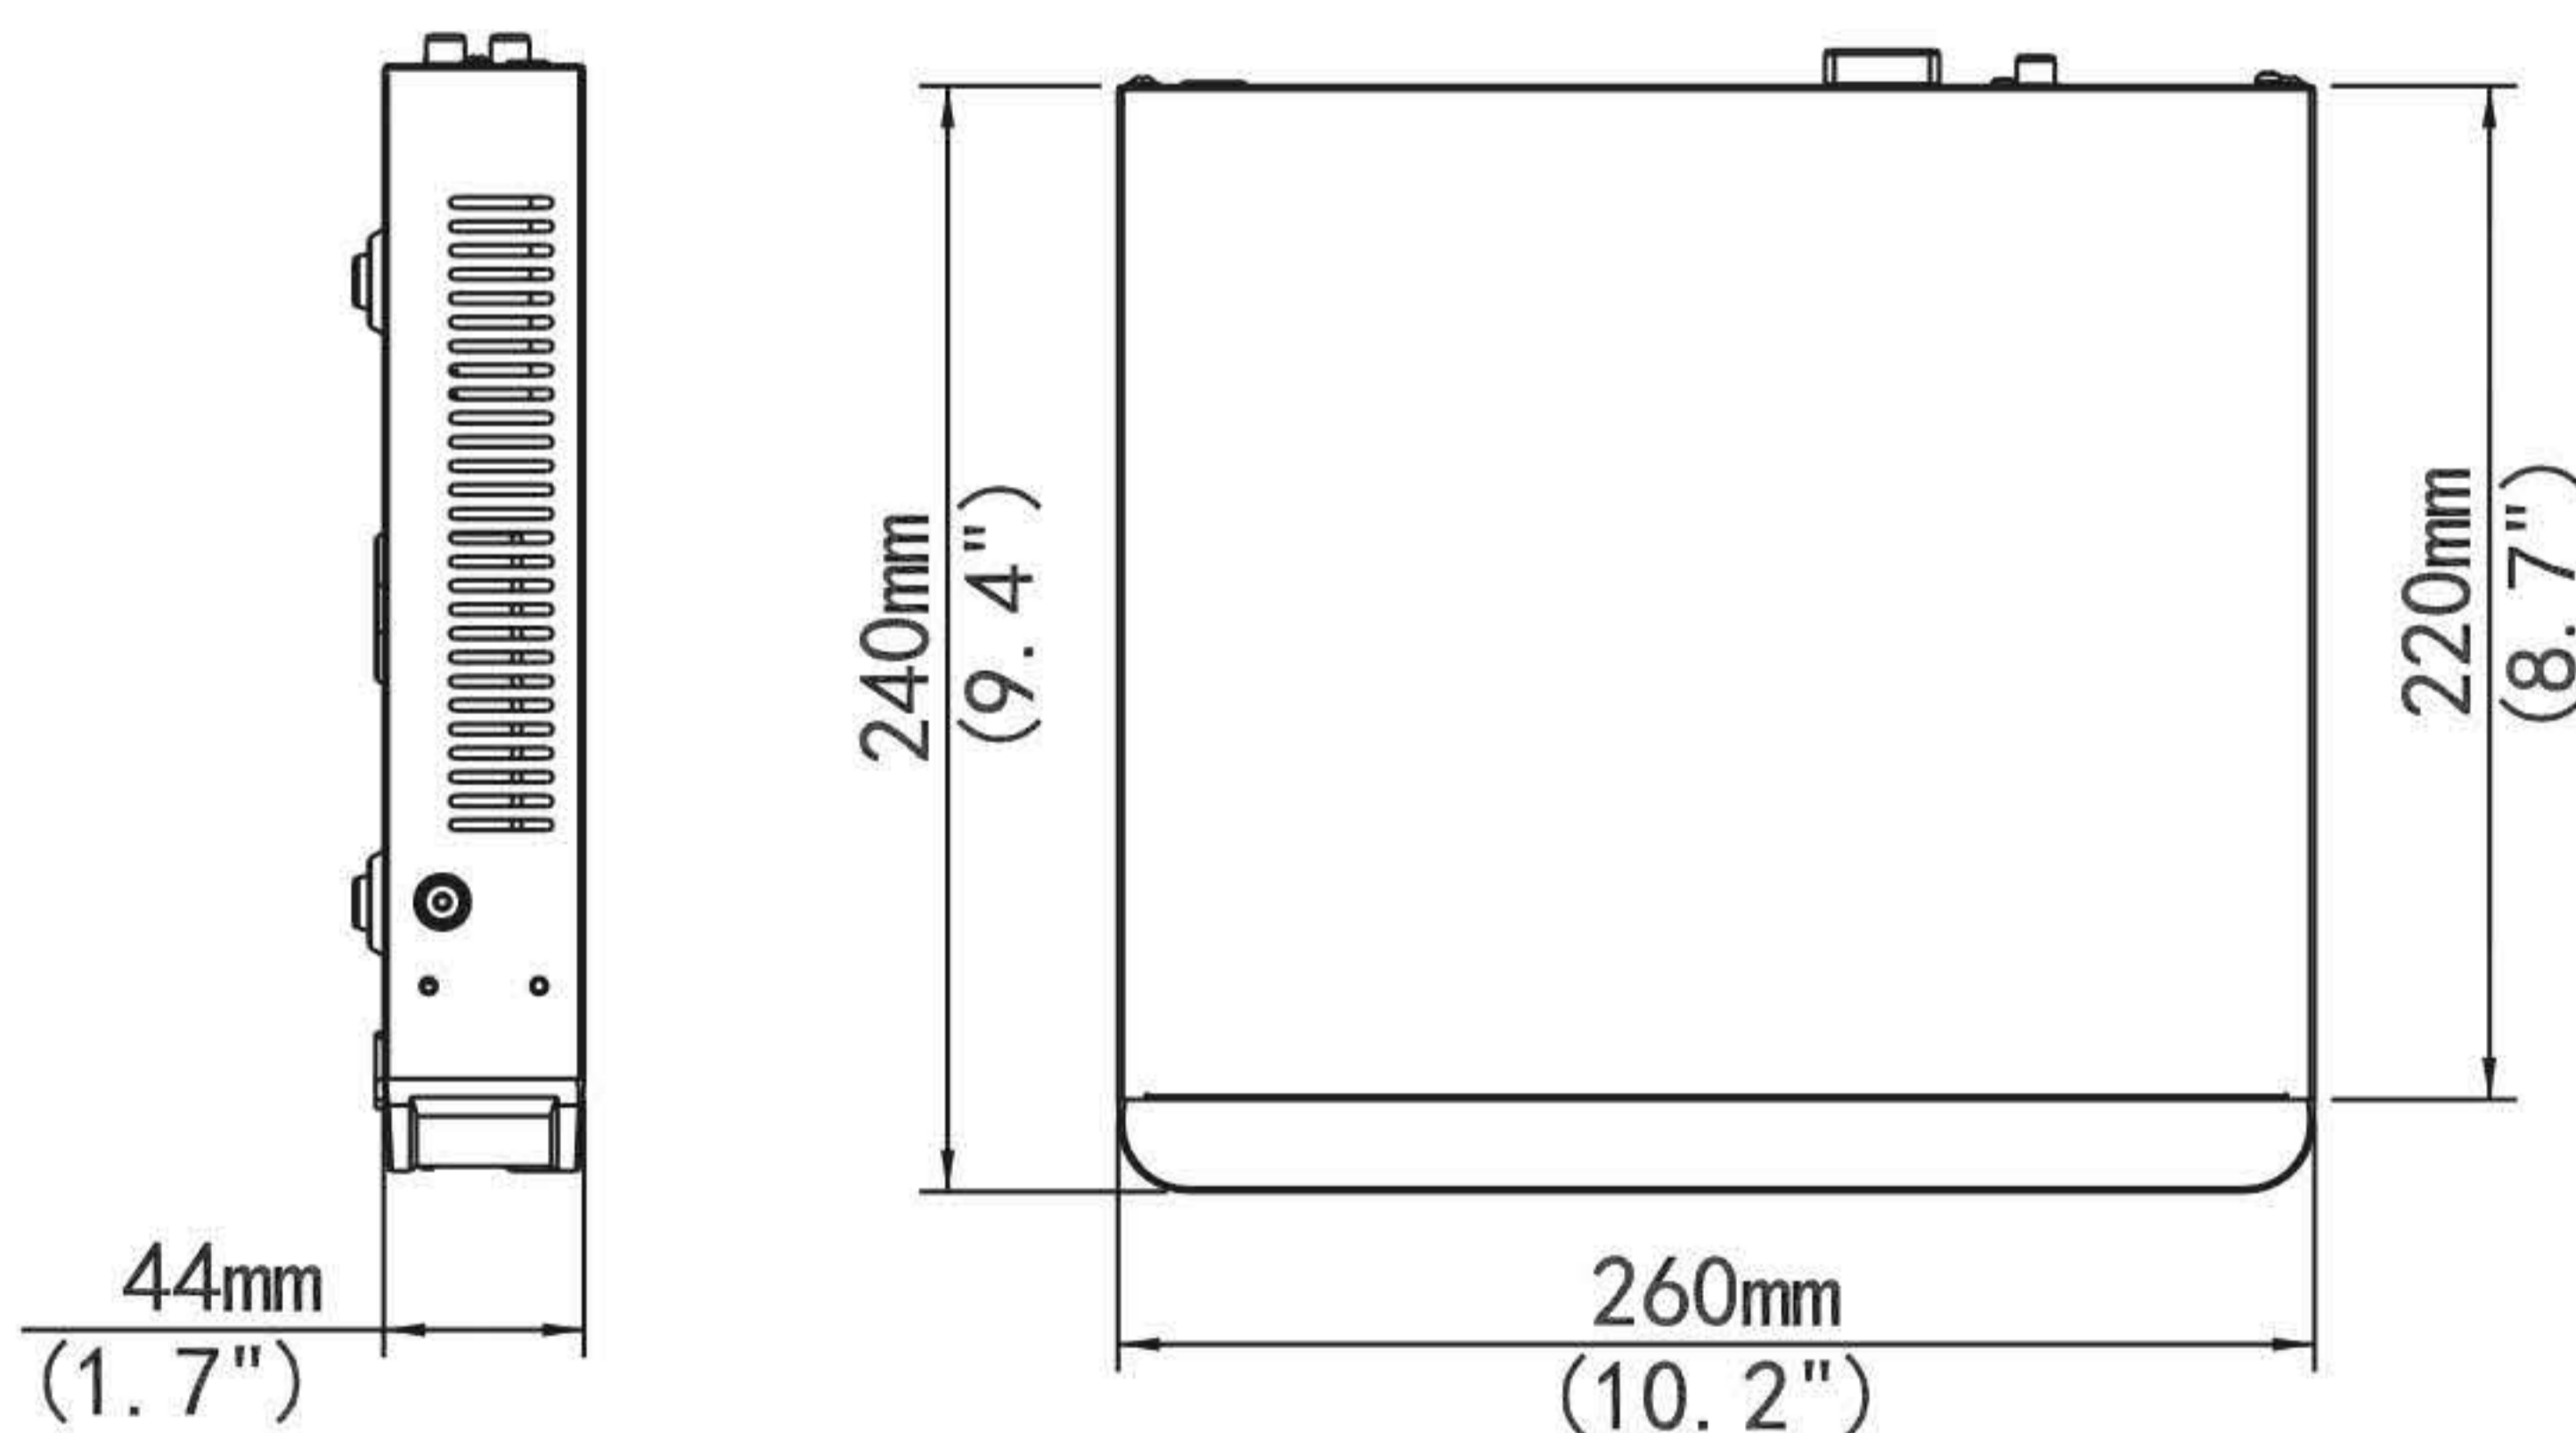

Rear Panel

