

NVR-E16-1D

Network Video Recorder



قابلیت های کلیدی

- یک عدد HDMI 4K و یک عدد VGA همزمان
- پشتیبانی از 1 عدد هارد تا 6 ترابایت
- قابلیت بروزرسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 16 کانال تصویر ورودی تا رزولوشن 4K
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	16-ch
Two-way Audio Input	1-ch, RCA
Incoming Bandwidth	64Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30
SATA	1 SATA interface
Capacity	up to 6TB
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking, Object Left Behind, Object Removed, Human Body detection, People Counting, People flow Counting, Crowd density monitoring, SIP by IPC
VCA Search	Face search, Behavior search
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0
Power Supply	12V DC Power Consumption: ≤8 W (without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm×240mm×47mm (10.2"×9.4"×1.9")
Weight (without HDD)	1.3kg (2.87 lb)

Dimensions

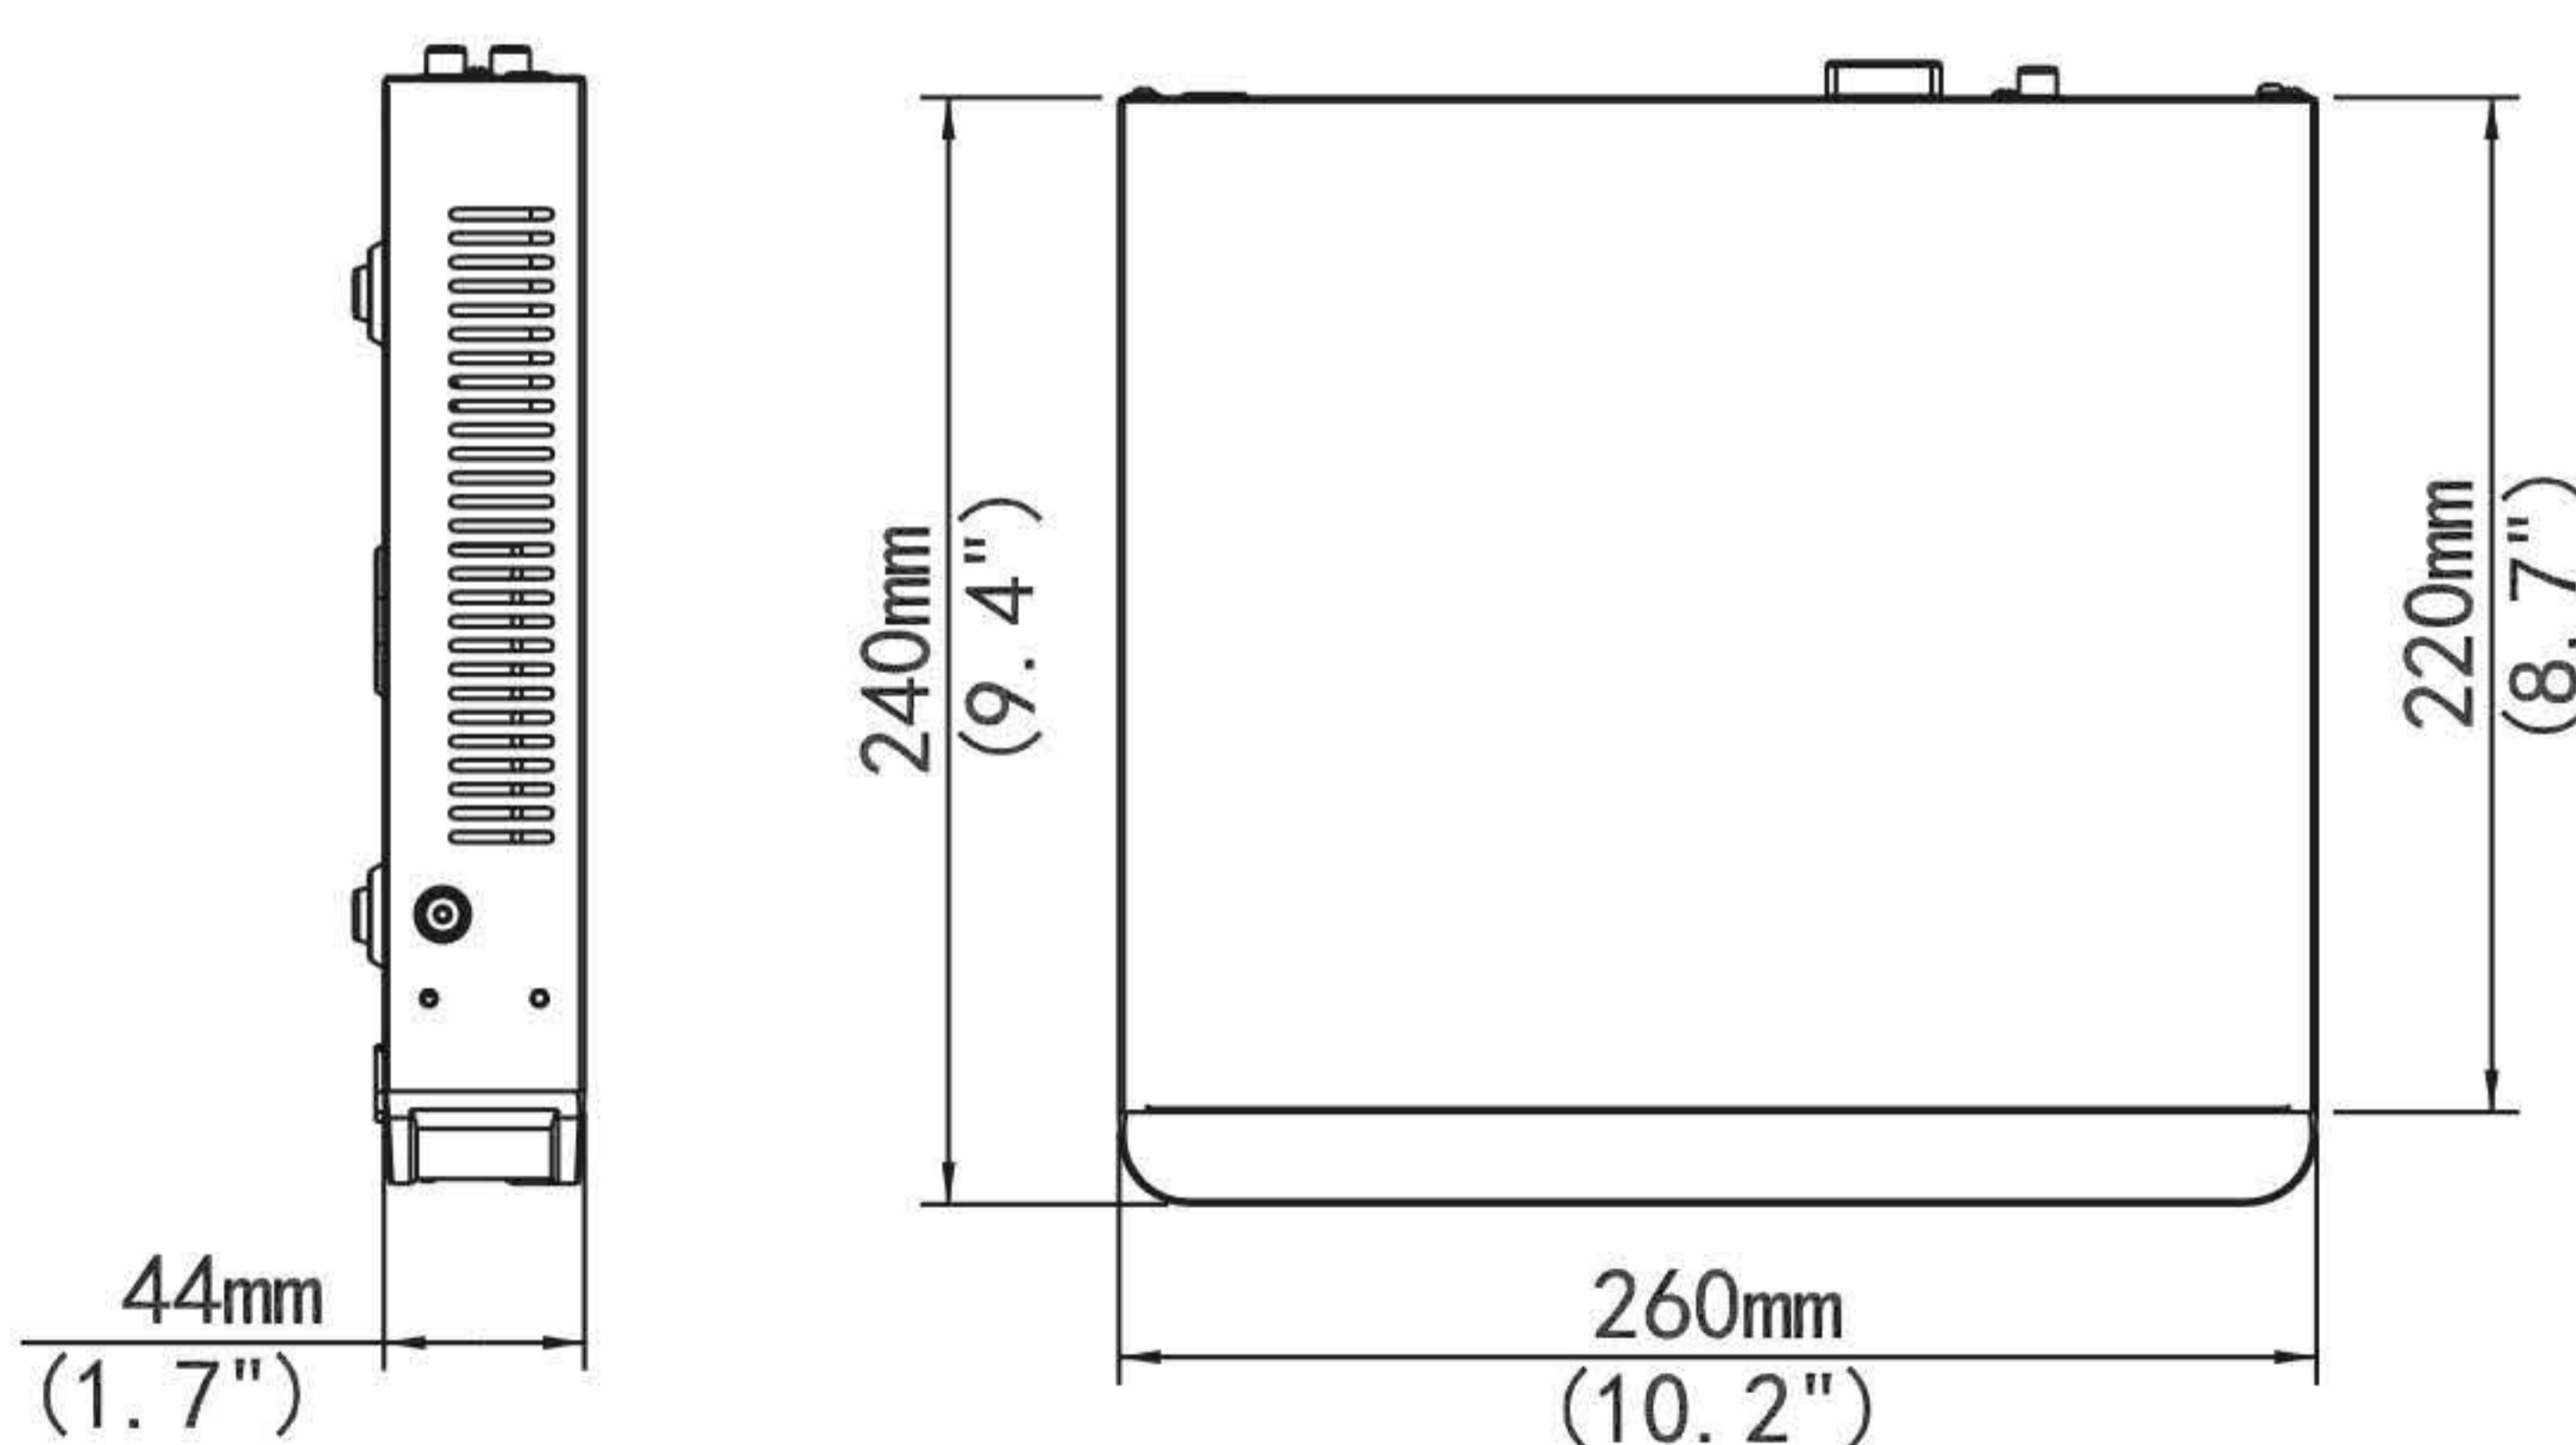

Rear Panel

