

NVR-E32R-4/16D

Network Video Recorder



قابلیت های کلیدی

- یک عدد 4K HDMI و یک عدد VGA مستقل از هم
- پشتیبانی از 4 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- پشتیبانی از RAID 1,5
- قابلیت برگرداندن تصاویر ضبط شده بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 32 کانال تصویر ورودی تا رزولوشن 12 مگاپیکسل
- دارای 16 پورت PoE با توان کلی 150 وات
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Incoming bandwidth	320Mbps
Outgoing bandwidth	320Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz, 1024x768/60Hz, 1024x768/60Hz, RCA
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Audio Compression	6.711A, 6.711U
Synchronous Playback	16-ch
Live View Display	1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
FTP/Schedule/Event Snapshot	16-ch snapshot, up to 1080P resolution
Decoding Format	Ultra 265, H.265, H.264
Live View/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 12MP@2,30 x 4K@5,30 x 4MP@ 10,30 x 1080P@22,30 x 720P@32,30 x D1
SATA	4 SATA interfaces
Capacity	up to 10TB for each HDD
eSATA	NA

VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, People Counting, Scene Change detection, Auto Tracking, Face and Vehicle Recognition by IPC, Object Left Behind, Object Removed, SIP by IPC
VCA Search	Face Search, Behavior Search
Disk Group	Support
RAID	RAID 1,5
Smart Intrusion Prevention (SIP), Vehicle Detection by Camera	Total -8ch
General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Input Alarm, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0NA
RS232	NA
RS485	1
Alarm In	16-ch
Alarm Out	4-ch
Interface	16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 150W in total
Supported Standard	IEEE 802.3af/at
Power Supply	100-240V AC Power Consumption: ≤ 20 W (without HDD)
Working Environment	*10-C-+ *55C (*14+F- *131+F), Humidity ≤ %90 RH (non-condensing)
Dimensions (W×D×H)	400mm × 363mm × 74mm (2.9 × *14.3 × *15.7")
Weight (without HDD)	≤4Kg (8.82lb)

Dimensions

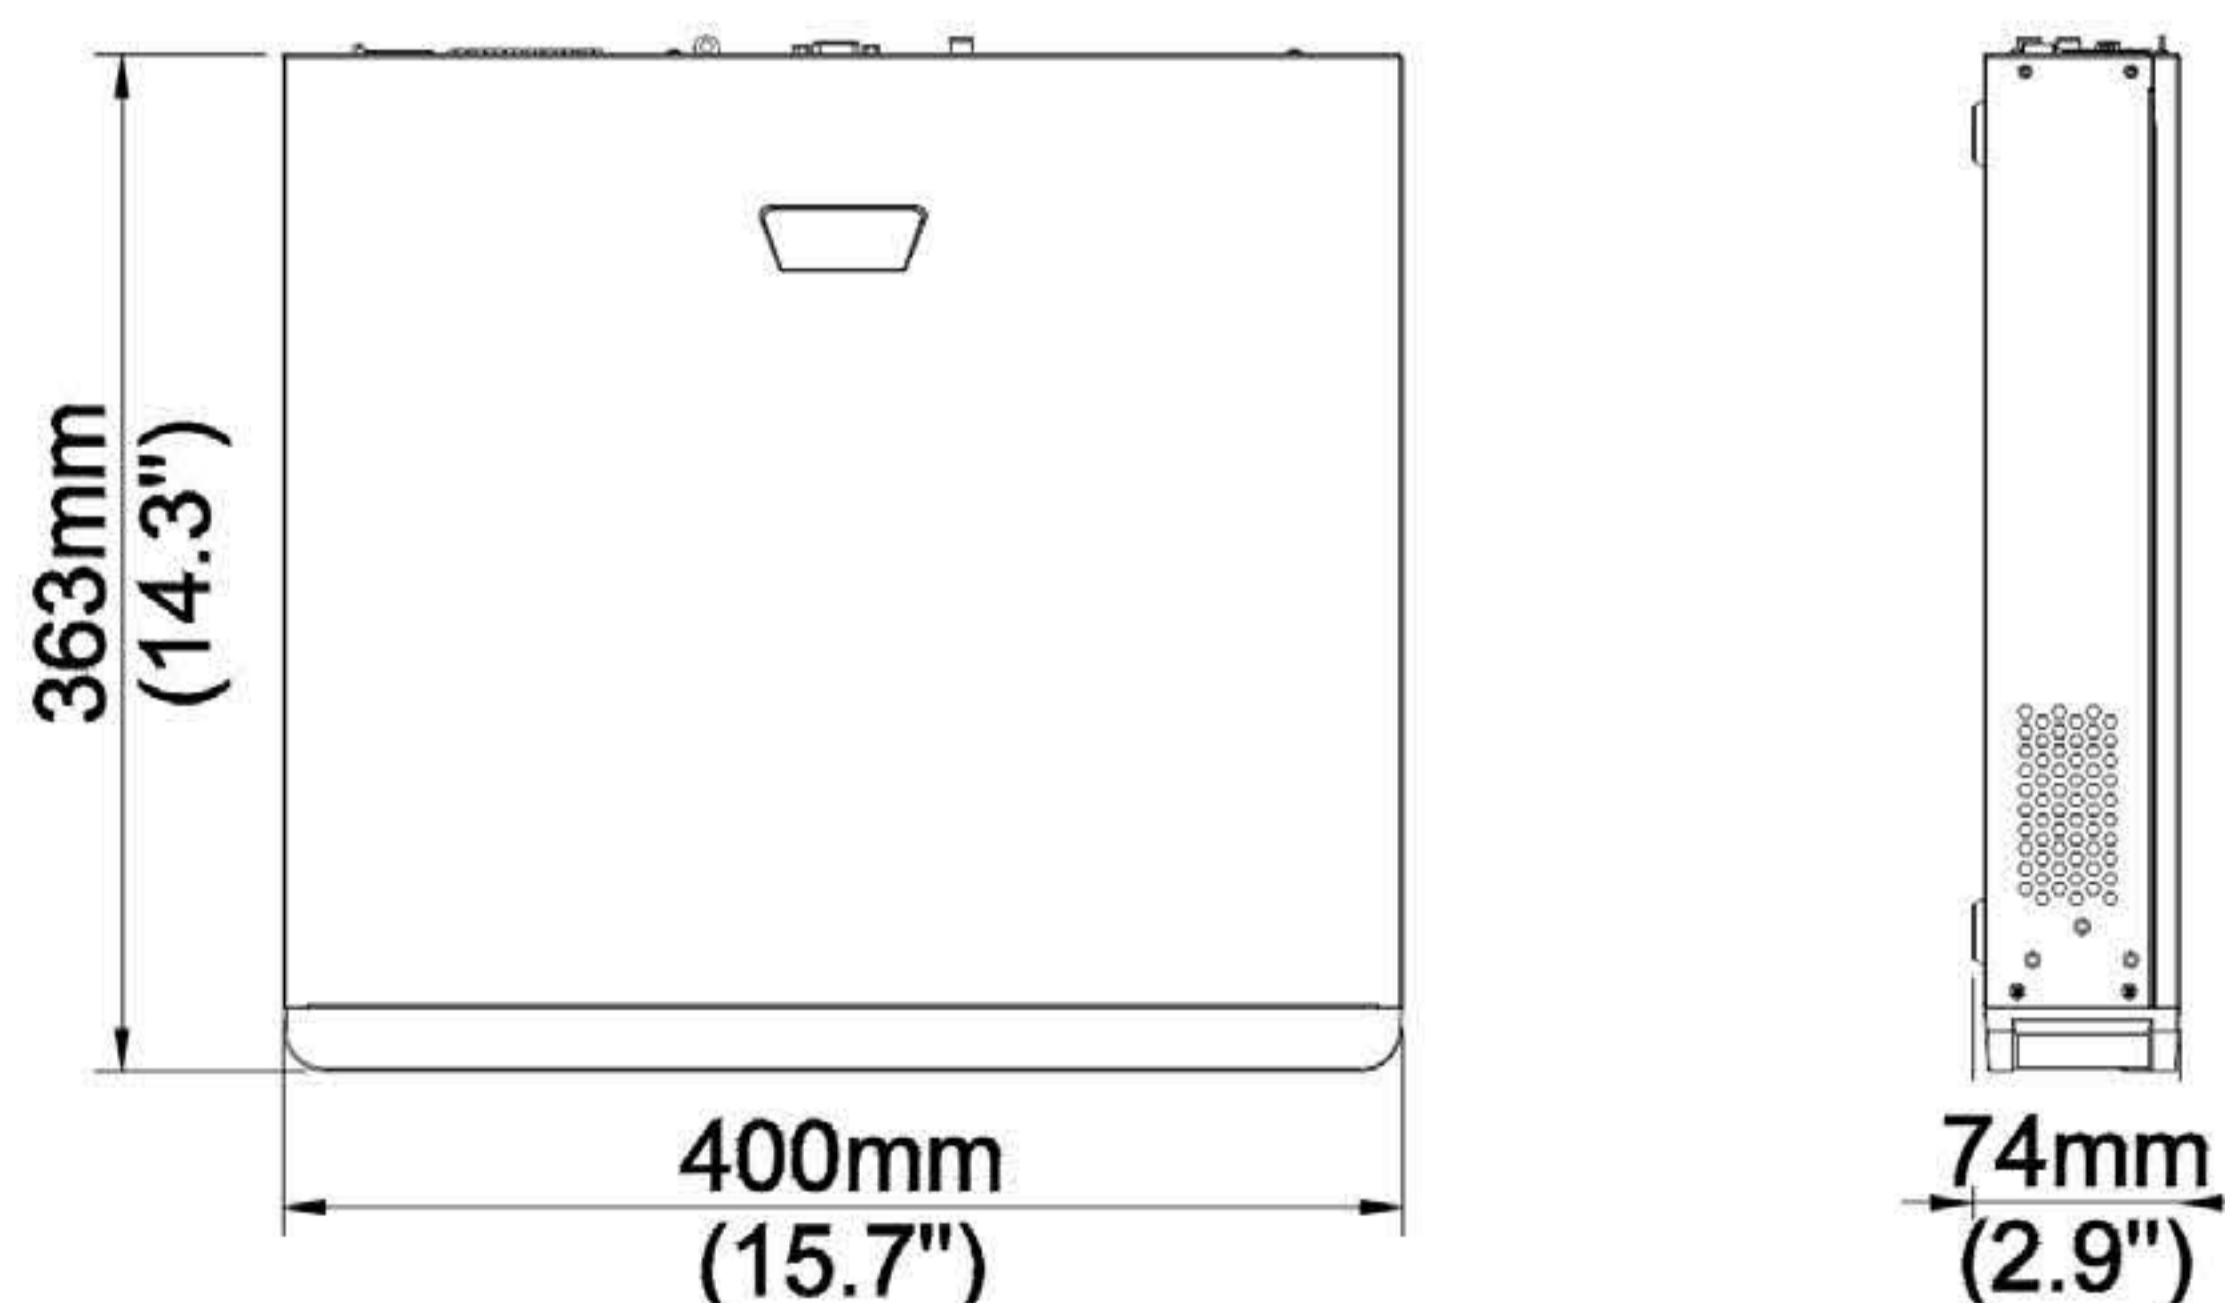

Rear Panel

