

NVR-P16-4/16A

Network Video Recorder



قابلیت های کلیدی


- پشتیبانی از 4 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- خروجی 12 ولت
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 16 کانال تصویر ورودی تا رزولوشن 12 مگاپیکسل
- دارای 16 پورت POE با توان کلی 200 وات
- پشتیبانی از دوربین های با پروتکل ONVIF
- دو عدد HDMI 4K و یک عدد VGA

Specifications

IP Video Input	16-ch	SATA	4 SATA interfaces
Two-way Audio Input	1-ch, RCA	Capacity	up to 10TB for each HDD
Incoming Bandwidth	320Mbps	Network Interface	1 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
Outgoing Bandwidth	320Mbps	VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
Remote Users	128	Serial Interface	1 x RS485
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	USB Interface	Front panel: 2 x USB2.0 Rear panel: 1 x USB3.0
HDMI/VGA Output	HDMI1/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/60Hz, 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	Alarm In	16-ch
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Alarm Out	4-ch
Audio Output	1-ch, RCA	Power Output	12 VDC
Synchronous Playback	16-ch	Interface	16 independent 100 Mbps PoE network interfaces
Corridor Mode Screen	3/4/5/7/9/10/12/16	Max Power	Max 30W for single port Max 200W in total (12.5W for each)
Decoding format	Ultra 265, H.265, H.264	Supported Standard	IEEE 802.3at
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Power Supply	100-240 VAC Power Consumption: ≤ 20 W (without HDD)
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30	Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
		Dimensions (W×D×H)	442 mm× 425mm×89mm (17.4" × 16.7"×3.5")
		Weight (without HDD)	≤ 5.24 Kg(11.55lb)

Dimensions

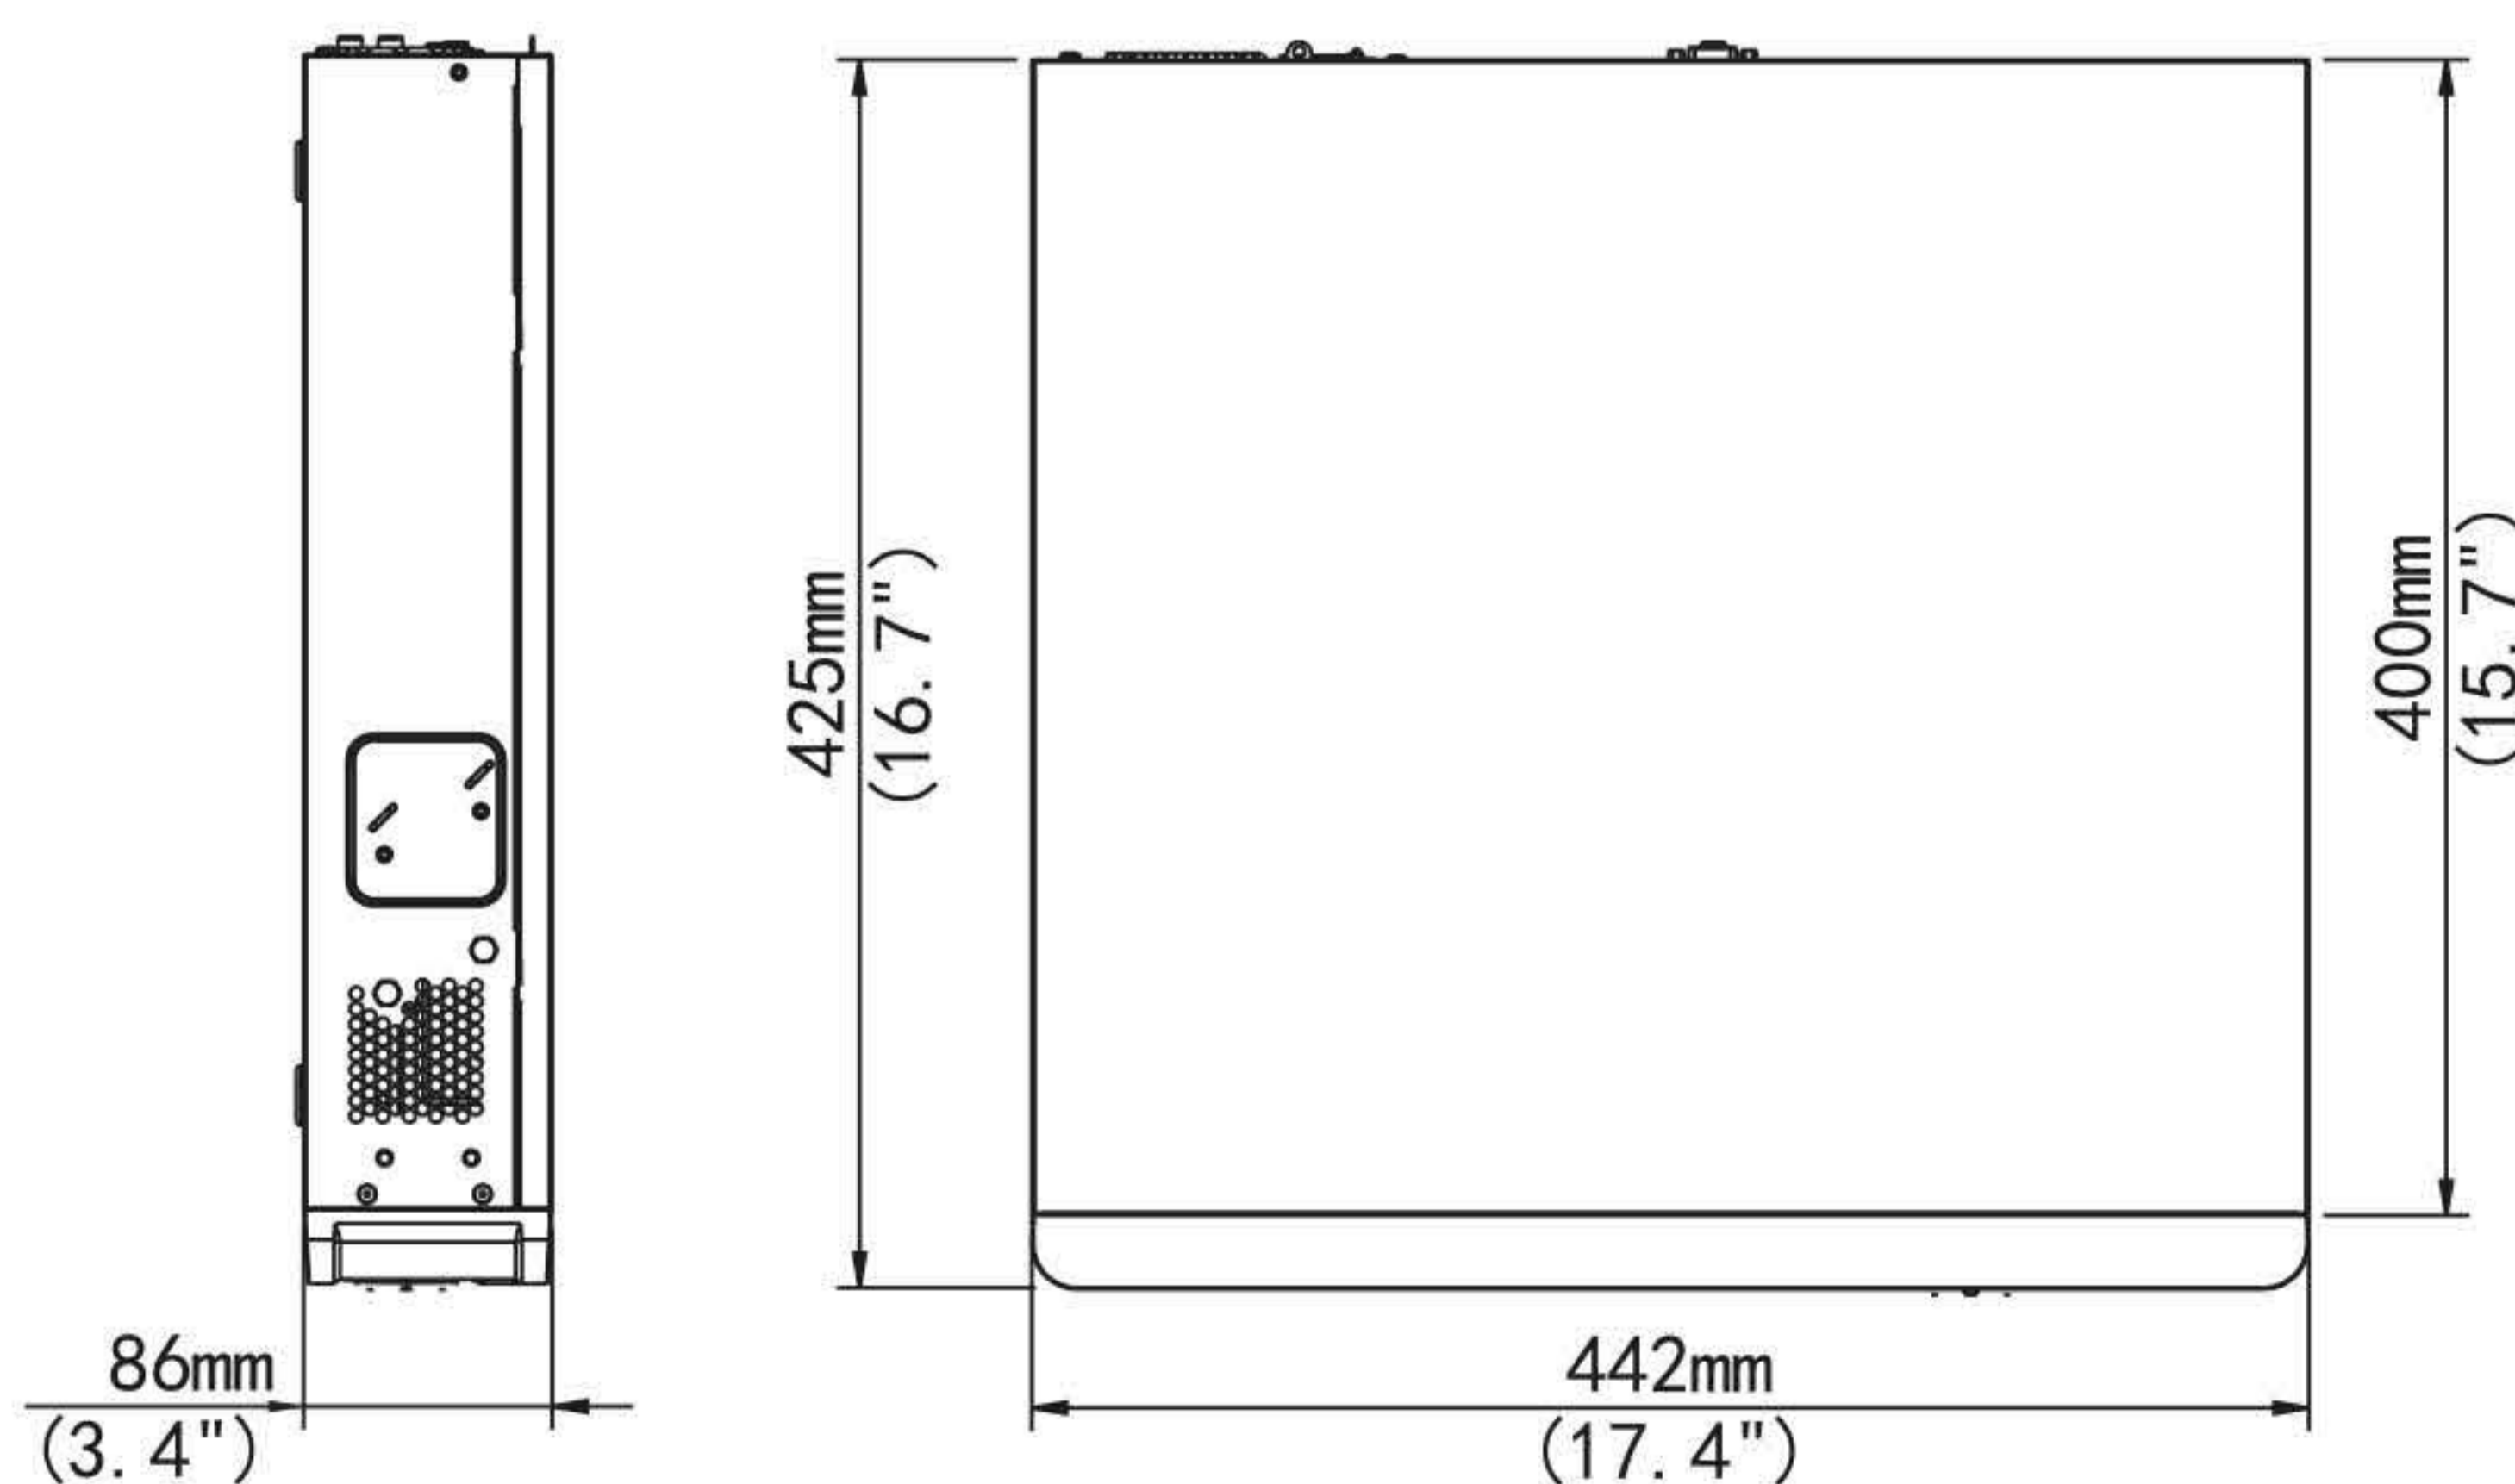

Rear Panel

