

NVR-P32-4A

Network Video Recorder



Network
Cameras

NVRs

AHD
Series

Video
Decoders

Switches

Accessories

قابلیت های کلیدی

- پشتیبانی از 4 عدد هارد تا ظرفیت 10 ترابایت برای هر کدام
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 32 کانال تصویر ورودی تا رزولوشن 12 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF
- دو عدد HDMI و یک عدد VGA

Specifications

IP Video Input	32-ch
Two-way Audio Input	1-ch, RCA
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	HDMI1/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/60Hz, 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Decoding format	Ultra 265, H.265, H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080p@30, 32 x 960p@25

SATA	4 SATA interfaces
Capacity	up to 10TB for each HDD
eSATA	1 eSATA interface
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1 x RS485
USB Interface	Front panel: 1 x USB2.0 Rear panel: 1 x USB2.0, 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
Power Supply	12V DC Power Consumption: ≤ 12W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	440mm × 344mm × 50mm (17.3" × 13.5" × 2.0")
Weight (without HDD)	≤ 3.14Kg (6.92lb)

Dimensions

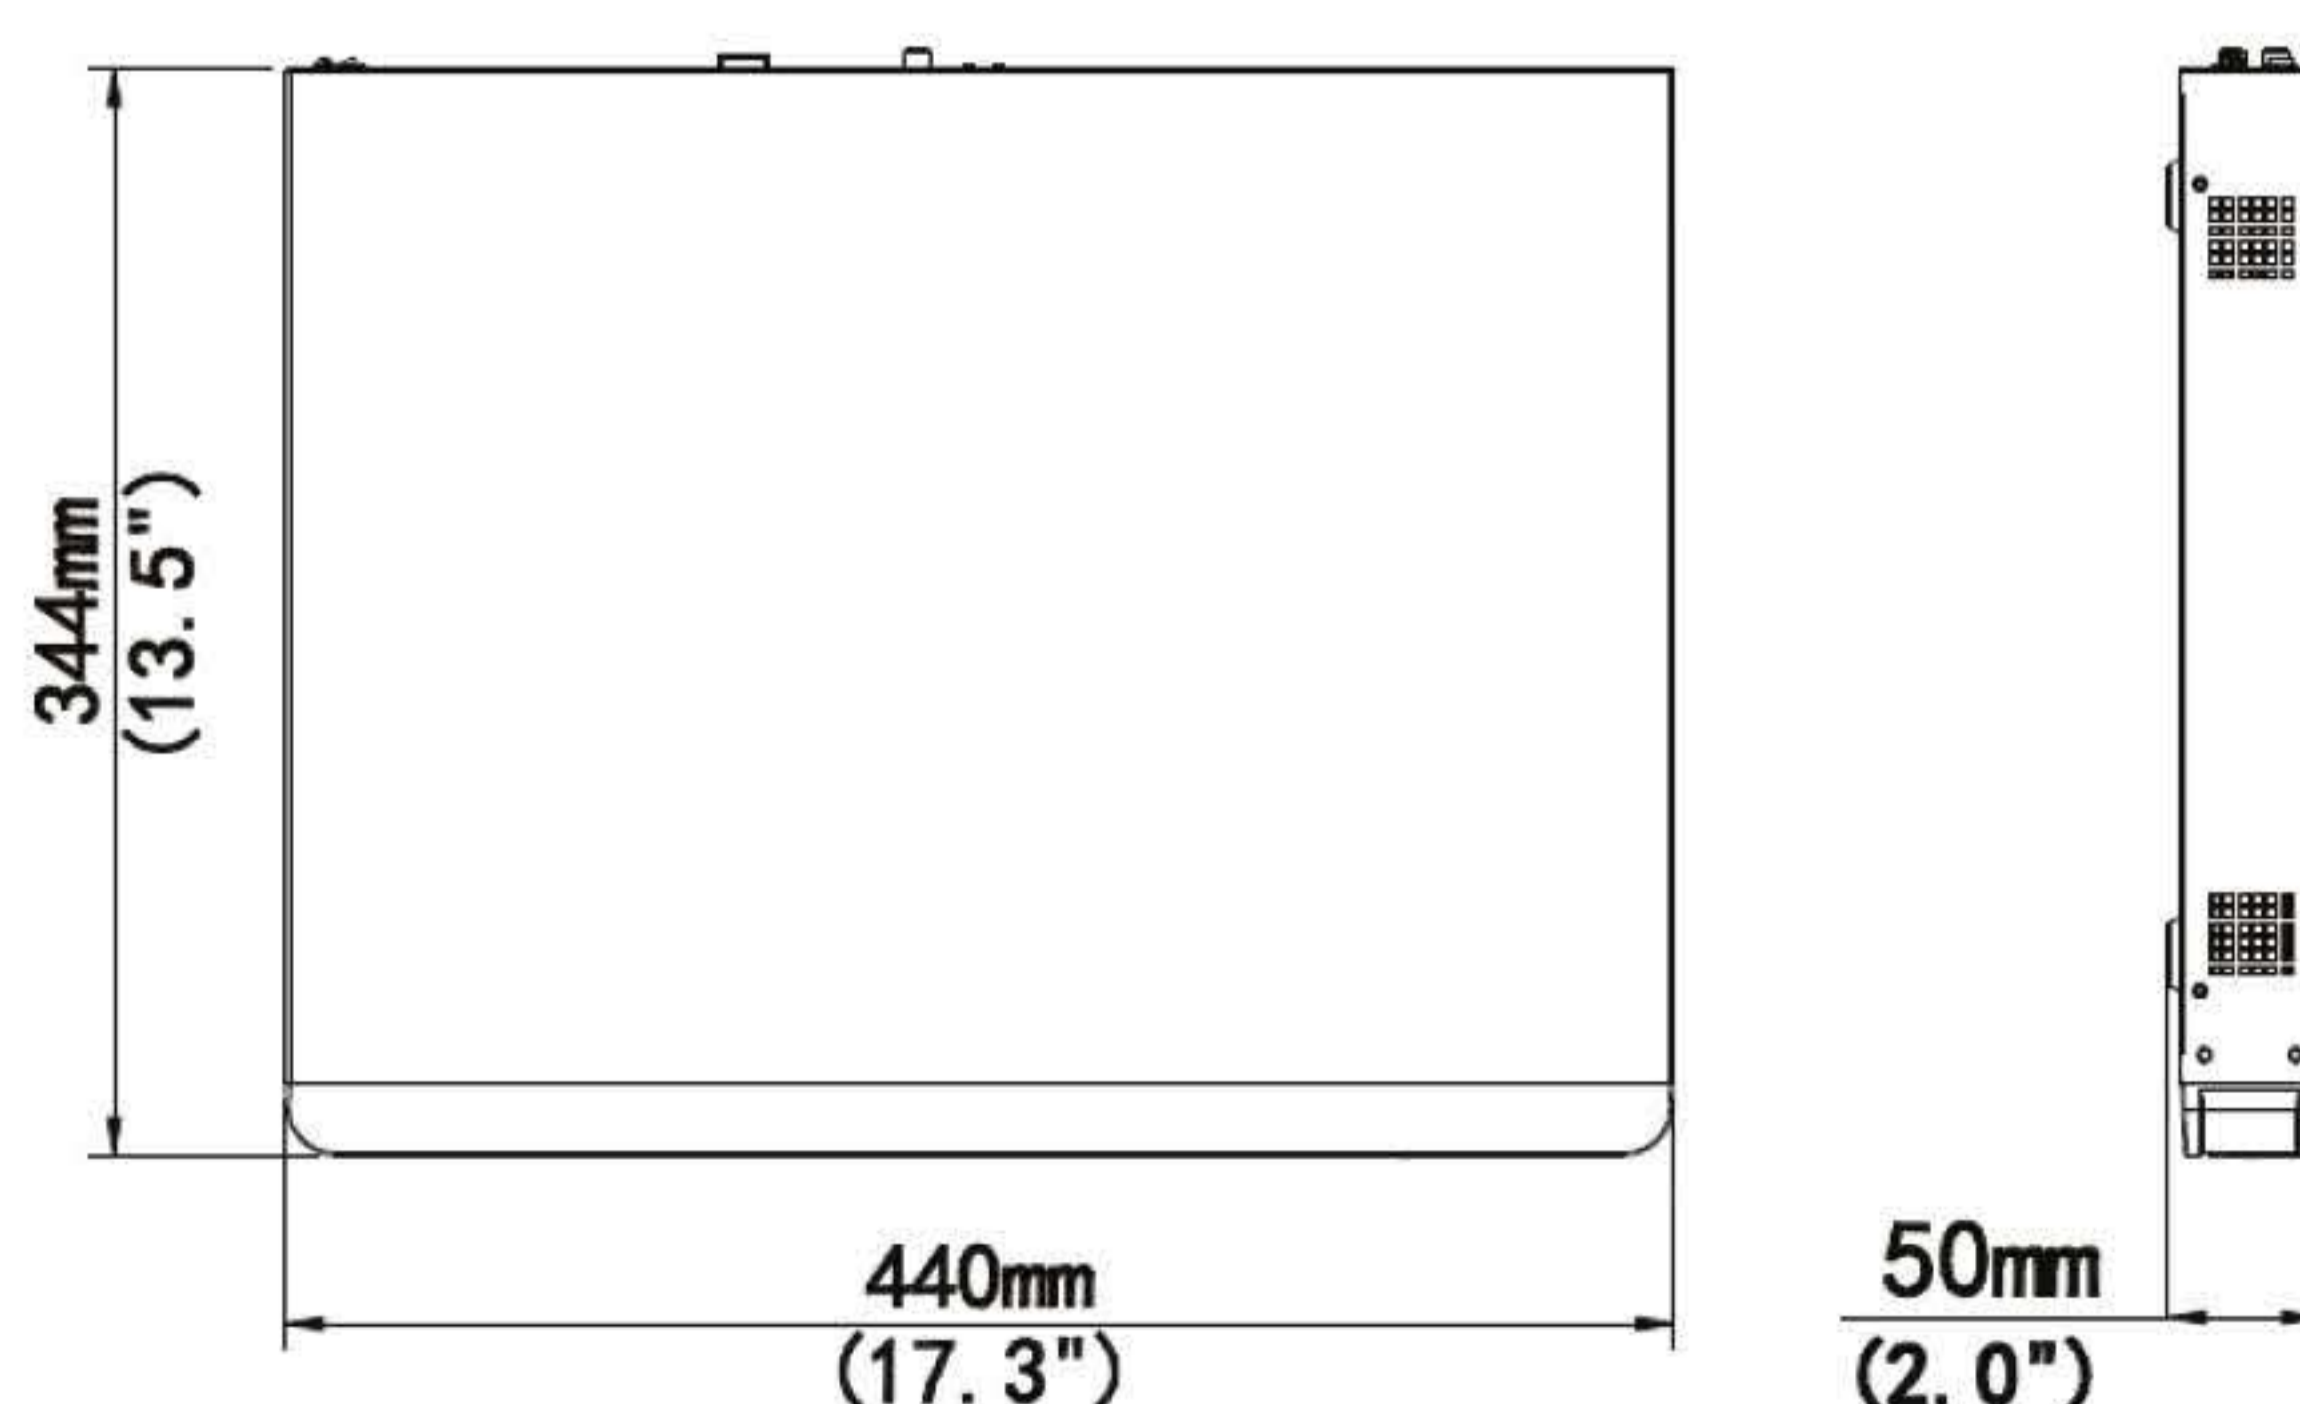

Rear Panel

