

# HiLook

سیستم نظارت تصویری  
عملکرد فوق العاده  
قیمت مناسب

راهکار IP  
HILOOK




[www.hikvision.com](http://www.hikvision.com)  
[www.pars-e.com](http://www.pars-e.com)

پارس ارتباط افزار

نماینده رسمی توزیع سیستم های نظارت تصویری در ایران

## راهکار نظارت تصویری

به عملکرد بالا نیاز دارید؟ به دنبال قیمت مناسب هستید؟ محصولات HiLook را مشاهده کنید.  
Hikvision برند فرعی HiLook در سطح ابتدایی بازار نظارت تصویری با ارائه محصولات بسیار مقرر و به صرفه،  
با امکان استفاده آسان و با قابلیت اعتماد بالا تمام نیازها را برآورده کرده است.

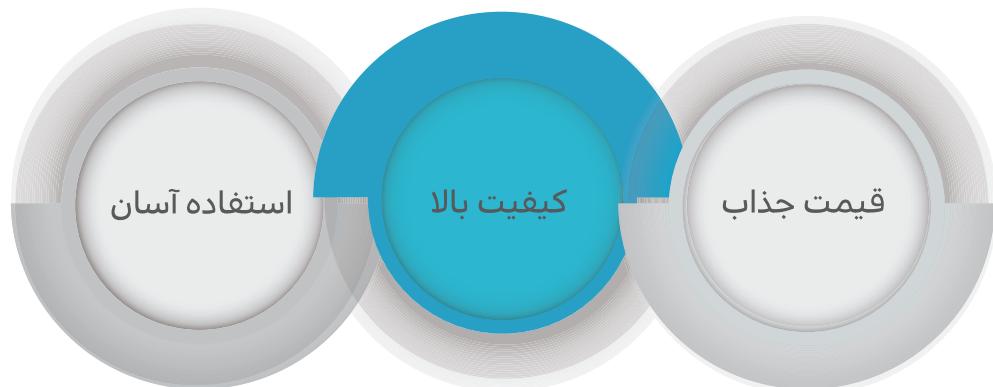



HiLook



# HiLook



## راهکار IP

سری IP محصولات HiLook با نسبت فوق العاده پایین هزینه به کارایی، پیشرفته ترین امکانات را در این محدوده قیمت ارائه می نماید: فرمت فشرده سازی با کارایی بالای H.265+ جهت حداکثر کارایی در پهنای باند و فضای ذخیره سازی، تصویر برداری Super HD تا کیفیت 4MP و تکنولوژی جهت کارایی بیشتر تکنولوژی IR و WDR وسیع برای تعادل رنگ و روشنایی در شرایط نور سخت در این محصولات فراهم است.

یک نگاه کاملاً جدید برای نظارت تصویری با کیفیت بالا و مقرر گردیده برای کسب و کارهای کوچک تا متوسط است.





HiLook

4MP

کیفیت تصویر SUPER-HD



جزئیات شفاف در روز




ثبت رنگ بالا در شب

**H.265+**

## روش فشرده‌سازی با کارایی بالا متعلق به شرکت هایک ویژن

فشرده‌سازی با کارایی بالای H.265+ نه تنها پهنای باند بلکه نیازهای ذخیره‌سازی را کاهش داده و عملکرد کلی سیستم را بهبود می‌بخشد. H.265 در مقایسه با H.264 می‌تواند مدت ذخیره‌سازی را تا دو برابر افزایش دهد و در مقایسه با H.265+ در مقایسه با H.264 می‌تواند تا چهار برابر یا بیشتر عملکرد دوربین را بهینه‌سازی نماید. Hillock H.265+ در زمان و منابع شما صرفه‌جویی می‌نماید.

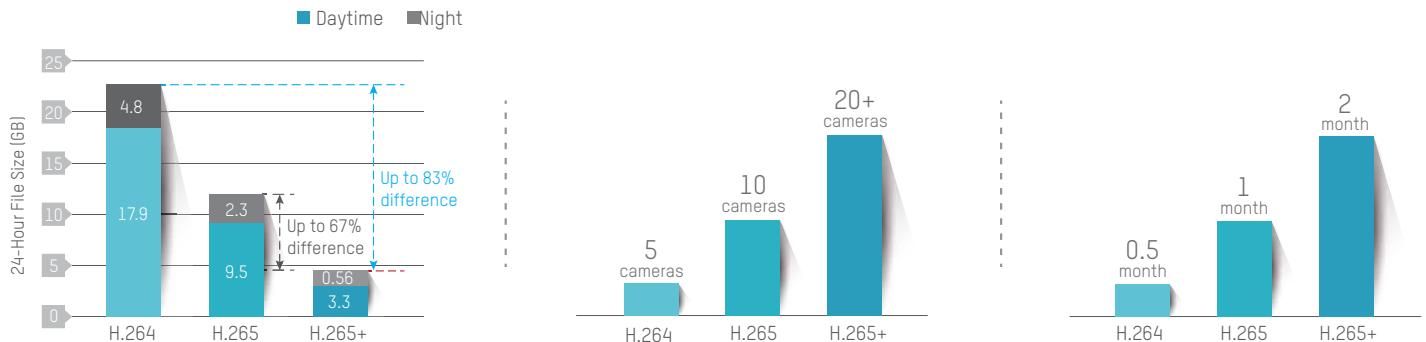

24-Hour recording file size (GB) comparing H.264, H.265, and H.265+  
 \*Data was tested in a common scene; for reference only.



20 MB Broadband Network



Eight 2-MP cameras



5TB HDDs


## WDR

## اصلاح رنگ به منظور تصویر برداری عالی

عملکرد WDR در نور شدید وضوح تصویر را بدون کاهش کیفیت، حفظ می‌نماید. به عنوان مثال WDR برابر 120dB در دوربین‌های تحت شبکه HiLook هنگام برخورد با نور خورشید، رنگ و جزئیات تصویری دقیق روی صفحه نمایش را تضمین می‌کند. دوربین‌های معمولی در این محیط‌ها تنها یک صحنه را ثبت می‌نمایند که تصاویر مهم را بی‌فایده می‌نماید. HiLook به صورت 24 ساعته با جزئیات و رنگ دقیق تصاویر را ضبط می‌کند.




WDR off

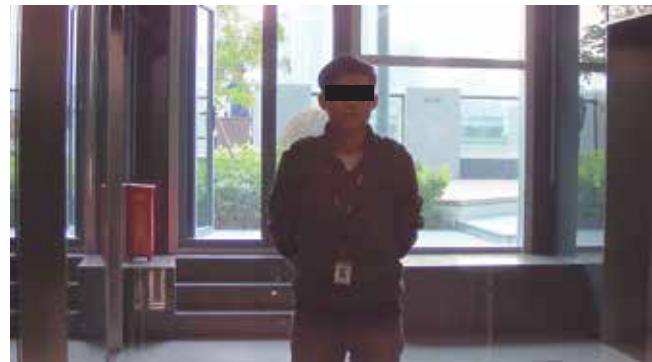

WDR on

# MORE FEATURES

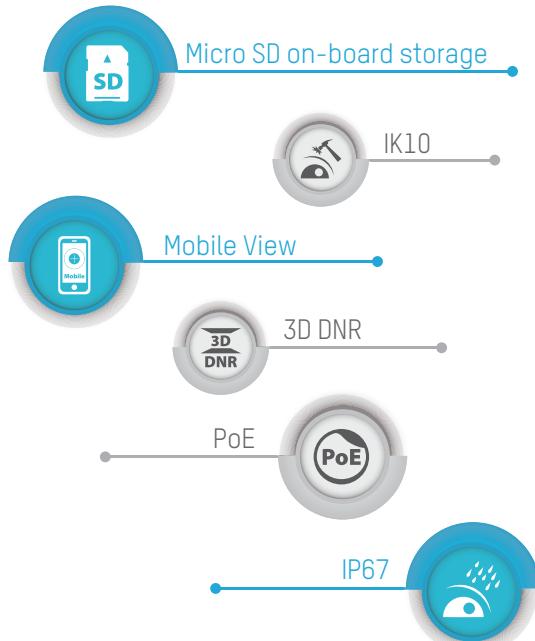

## EXIR 2.0

### قدرت IR بیشتر

در سیستم نظارت تصویری 24 ساعته، تصویربرداری با تکنولوژی مادون قرمز در شب و در محیطهای تاریک بک امر ضروری است.

EXIR 2.0 بازده تابشی بیشتری را برای سیستم‌های نظارت تصویری با تابش مادون قرمز فراهم می‌کند و تصاویر را در زمان و محلی که لازم است بهبود می‌بخشد.



EXIR 2.0



# HiLook NETWORK CAMERA H.265

## IPC-B140H

HOT

### 4MP Bullet EXIR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE



## IPC-D140H

HOT

### 4MP Dome IR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Base: Metal, Cover: Plastic
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE



## IPC-T240H

HOT

### 4MP Turret EXIR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE



## IPC-B120H

### 2MP Bullet EXIR Network Camera

- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Front Cover: Metal
- Rear Cover&Bracket: Plastic
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE

## IPC-D120H

### 2MP Dome IR Network Camera

- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- IP67, IK10, DWDR
- Supports PoE

## IPC-T220H

### 2MP Turret EXIR Network Camera

- Up to 2MP high resolution
- 4/6mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE



IPC-B140

### 4MP Bullet EXIR Network Camera

NEW

- Up to 4MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Front Cover: Metal
- Rear Cover&Bracket: Plastic
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE



IPC-B130

HOT NEW

### 3MP Bullet EXIR Network Camera

- Up to 3MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Front Cover: Metal
- Rear Cover&Bracket: Plastic
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE



IPC-B120

### 2MP Bullet EXIR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.264 & H.264+
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE



IPC-B100

### 1MP Bullet EXIR Network Camera

- Up to 1MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264
- Front Cover: Metal
- Rear Cover&Bracket: Plastic
- IR Range:Up to 30m
- IP67, DWDR
- Supports PoE



IPC-D140

NEW

### 4MP Dome IR Network Camera

- Up to 4MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- IP67, IK10, DWDR
- Supports PoE



IPC-D130

HOT NEW

### 3MP Dome IR Network Camera

- Up to 3MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- IP67, IK10, DWDR
- Supports PoE



# HiLook NETWORK CAMERA H.265

## IPC-B640H-V/Z

### 4MP VF Dome EXIR Network Camera

HOT



## IPC-D640H-V/Z

### 4MP VF Dome EXIR Network Camera

HOT



## IPC-T641H

HOT

### 4MP VF Turret EXIR Network Camera



## IPC-B620H-V/Z

## IPC-B620H-V/Z

### 2MP VF Bullet EXIR Network Camera

HOT



## IPC-D620H-V/Z

## IPC-D620H-V/Z

### 2MP VF Dome EXIR Network Camera

HOT



## IPC-T621H

## IPC-T621H

### 2MP VF Turret EXIR Network Camera

HOT



## Product Showcase

## NETWORK CAMERA H.264



IPC-T240

4MP Turret EXIR Network Camera



NEW

- Up to 4MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30m
- IP67, DWDR
- Supports PoE

IPC-T220

2MP Turret EXIR Network Camera



- Up to 2MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30m
- IP67, DWDR
- Supports PoE

IPC-B641-V/Z

NEW

4MP VF Bullet EXIR Network Camera



- Up to 4MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67, 120dB WDR
- Full Metal
- IR Range: Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-T230

3MP Turret EXIR Network Camera

HOT NEW

- Up to 3MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30m
- IP67, DWDR
- Supports PoE



IPC-T200

1MP Turret EXIR Network Camera

- Up to 1MP high resolution
- 2.8/4/6mm fixed lens
- Supports H.264+/H.264
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30m
- IP67, DWDR
- Supports PoE



IPC-B631-V/Z

HOT NEW

3MP VF Bullet EXIR Network Camera

- Up to 3MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67, DWDR
- Full Metal
- IR Range: Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



# HiLook NETWORK CAMERA H.264

## IPC-D120

### 2MP Dome IR Network Camera



- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Base: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67 & IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE

## IPC-D100

### 1MP Dome IR Network Camera



- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Base: Metal, Cover: Plastic
- Supports H.264
- IP67 & IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE

## IPC-B220(-D)

### 2MP Bullet EXIR Network Camera



- Up to 2 MP high resolution
- 4/6mm fixed lens
- Base Bracket: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67, IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE

## IPC-B200(-D)

### 1MP Bullet EXIR Network Camera



- Up to 1 MP high resolution
- 4/6mm fixed lens
- Base Bracket: Metal, Cover: Plastic
- Supports H.264
- IP67, IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE

## IPC-T120(-D)

### 2MP Turret EXIR Network Camera



- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Eyeball: Plastic, Cover: Plastic
- Supports H.264 & H.264+
- DWDR
- IR Range: Up to 30 m
- Supports PoE



## IPC-T100(-D)

### 1MP Turret EXIR Network Camera

- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Eyeball: Plastic, Cover: Plastic
- Supports H.264
- DWDR
- IR Range: Up to 30 m
- Supports PoE

## NETWORK CAMERA & PTZ



IPC-T621

NEW

### 2MP VF Turret EXIR Network Camera



- Up to 2MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, DWDR
- Cover&Base: Plastic, Eyeball: Metal
- IR Range: Up to 30m
- Supports PoE & TF card slot
- motorized vari-focal lens

PTZ-N2204I-DE

HOT NEW

### 2MP 4x EXIR Network PTZ Camera



- Up to 2MP high definition, 4x optical zoom  
Color: 0.01 Lux @F1.6,  
B/W: 0.001 Lux @F1.6
- Supports H.265+/H.265
- IP66, 120dB WDR
- IR: up to 15m
- 12V DC & PoE+

PTZ-N4215-DE3

### 2MP 15X 4 inch PTZ Network Camera



- Up to 2 MP high definition, 15x optical zoom  
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- 12V DC & PoE+

13

NEW

PTZ-N2404I-DE

HOT NEW

### 4MP 4xEXIR Network PTZ Camera



- Up to 4MP high definition, 4x optical zoom  
Color: 0.05 Lux @F1.6,  
B/W: 0.005 Lux @F1.6
- Supports H.265+/H.265
- IP66, 120dB WDR
- IR: up to 15m
- 12V DC & PoE+

PTZ-N4215I-DE

HOT

### 2MP 15X 4 inch EXIR PTZ Network Camera



- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+



# HiLook NETWORK CAMERA H.264

IPC-B621-V/Z

NEW

## 2MP VF Bullet EXIR Network Camera

- Up to 2MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67, DWDR
- Full Metal
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-D630

NEW

## 3MP VF Dome EXIR Network Camera

- Up to 3MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, DWDR
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-T641

NEW

## 4MP VF Turret EXIR Network Camera

- Up to 4MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, DWDR
- Cover&Base: Plastic, Eyeball:Metal
- IR Range:Up to 30m
- Supports PoE & TF card slot
- motorized vari-focal lens



IPC-D640-V/Z

NEW

## 4MP VF Dome EXIR Network Camera

- Up to 4MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, 120dBWDR
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-D620

## 2MP VF Dome EXIR Network Camera

- Up to 2MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, DWDR
- Base: Metal, Cover:Plastic
- IR Range:Up to 30m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-T631

HOT NEW

## 3MP VF Turret EXIR Network Camera

- Up to 3MP high resolution
- 2.8 - 12mm VF lens
- Supports H.264+/H.264
- IP67&IK10, DWDR
- Cover&Base: Plastic, Eyeball:Metal
- IR Range:Up to 30m
- Supports PoE & TF card slot
- motorized vari-focal lens

**NVR-104MH-C/4P****HOT****4-ch 1 HDD 4 PoE Network Video Recorder**

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 4-Ch. 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 POE interfaces
- Standalone 1U case (Metal)

**NVR-108MH-C****HOT****8-ch 1 HDD Network Video Recorder**

- 80 Mbps input max., up to 8 ch. of IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Standalone 1U case (Metal)

**NVR-108MH-C/8P****HOT****8-ch 1 HDD 8 PoE Network Video Recorder**

- 80 Mbps input max., up to 8 ch. of IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 POE interfaces
- Standalone 1U case (Metal)

**NVR-116MH-C****HOT NEW****16-ch 1HDD Network Video Recorder**

- 160Mbps input max.; up to 16 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6TB
- Standalone 1U case(Metal)

**NVR-208MH-C****HOT NEW****8-ch 2HDD Network Video Recorder**

- 80Mbps input max.; up to 8 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Standalone 1U case(Metal)

**NVR-208MH-C/8P****8-ch 2HDD Network Video Recorder**

- 80Mbps input max.; up to 8 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Supports 8 POE interfaces
- Standalone 1U case(Metal)



## PTZ-N4225I-DE

### 2MP 25X 4 inch EXIR PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom  
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+



## PTZ-N4425I-DE

### 4 MP 25× EXIR Network Speed Dome

- Up to 4MP high definition, 25x optical zoom  
Color: 0.005 Lux @ F1.6,  
B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120dB WDR
- IR: up to 100m
- 12V DC & PoE+



## PTZ-P332ZI-DE3

### PanoVu Mini Series EXIR Network PTZ Camera

- 3×2MP panoramic images, PTZ: 4x optical zoom  
Color: 0.05 Lux @ F2.0,  
B/W: 0.01 Lux @ F2.0
- Supports H.265+/H.265
- IP66, 120dB WDR
- IR: up to 10m
- 12V DC & PoE+



## PTZ-N4415-DE3

### 4MP 15× Network Speed Dome

- NEW
- Up to 2MP high definition, 15× optical zoom  
Color: 0.005 Lux @F1.6,  
B/W: 0.001 Lux @F1.6
  - Supports H.265+/H.265
  - IP66, DWDR
  - 12V DC & PoE+



## PTZ-N5225I-AE

HOT NEW

### 2MP 25X 5 inch EXIR PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom  
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+/H.265
- IP66, 120 dB WDR
- IR: 150 m
- 12V DC & Hi-PoE



## NVR-104MH-C

HOT

### 4-ch 1 HDD Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Standalone 1U case (Metal)

**NVR-216MH-C****HOT NEW****16-ch 2HDD Network Video Recorder**

- 160Mbps input max.; up to 16 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Standalone 1U case(Metal)

**NVR-104-B****4-ch 1 HDD Network Video Recorder**

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U case (Plastic)

**NVR-104-B/4P****4-ch 1 HDD 4 PoE Network Video Recorder**

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 PoE interfaces
- Mini 1U case (Plastic)

**NVR-216MH-C/16P****HOT NEW****16-ch 2HDD Network Video Recorder**

- 160Mbps input max.; up to 16 ch. IP camera input
- 1-ch 8 MP / 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 2 SATA interface, up to 6TB
- Supports 16 PoE interfaces
- Standalone 1U case(Metal)

**NVR-108-B****8-ch 1 HDD Network Video Recorder**

- 60 Mbps input max., up to 4 ch. of IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U case (Plastic)

**NVR-108-B/8P****8-ch 1 HDD 8 PoE Network Video Recorder**

- 60 Mbps input max., up to 8 ch. of IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 PoE interfaces
- Mini 1U case (Plastic)

سیستم نظارت تصویری  
عملکرد فوق العاده  
قیمت مناسب  
راهکار IP  
HILOOK



[www.pars-e.com](http://www.pars-e.com)  
[www.hikvision.com](http://www.hikvision.com)

نماينده رسمي پارس ارتباط افزا:



دفتر مرکزی: تهران، خیابان ولیعصر، خیابان زعفرانیه، خیابان اعجازی (آصف)، ساختمان ۳۹  
مرکز آموزش و خدمات پس از فروش: تهران، خیابان شهید بهشتی، خیابان سرافراز، کوچه سوم، ساختمان ۱۲  
تلفن: ۰۲۱ - ۸۹۳ ۹۵ - ۰۲۱ - ۸۹۳ ۹۵ (داخلی ۶)  
فکس: