

NVR-E16-1/8A

Network Video Recorder



قابلیت های کلیدی


- خروجی همزمان HDMI و 4K و VGA
- پشتیبانی از 1 عدد هارد تا 10 ترابایت
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروز رسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 16 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- دارای 8 پورت POE با توان کلی 108 وات
- پشتیبانی از دوربین های با قابلیت ONVIF

Specifications

IP Video Input	16-ch	Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Two-way Audio Input	1-ch, RCA	Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30, 8 x 720p@30, 16 x D1
Incoming Bandwidth	60Mbps	SATA	1 SATA interface
Outgoing Bandwidth	80Mbps	Capacity	up to 10TB for each disk
Remote Users	128	Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	USB Interface	Rear panel: 2 x USB2.0, Front panel: 1 x USB2.0
HDMI/VGA Output	HDMI:	Alarm In	4-ch
	4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA:	Alarm Out	1-ch
	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	Interface	8 independent 100 Mbps PoE network interfaces
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	Max Power	Max 30W for single port Max 108W in total (13.5W for each)
Audio Output	1-ch, RCA	Supported Standard	IEEE 802.3at, IEEE 802.3af
Synchronous Playback	16-ch	Power Supply	52V DC Power Consumption: ≤ 9 W (without HDD)
Corridor Mode Screen	3/4/5/7/9/10/12/16	Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Decoding format	Ultra 265, H.265, H.264	Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2" × 9.4" × 1.8")
		Weight (without HDD)	≤ 1.12 Kg (2.47lb)

Dimensions

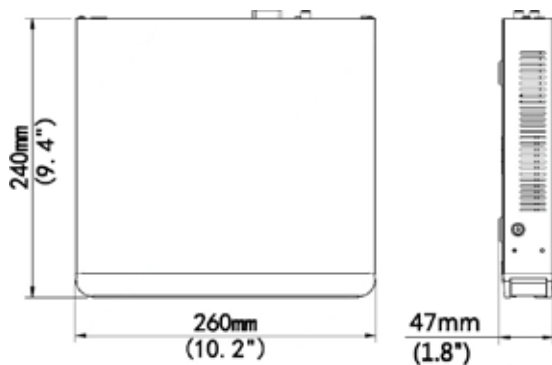

Rear Panel

