


Capture

**The solution for your protection:
flexible, performant and complete!**



The solution for your home, shop and business.

CAPTURE, completely designed and produced in Italy, is the modular and flexible range of control panels, suitable to any installations, from small to medium plants.

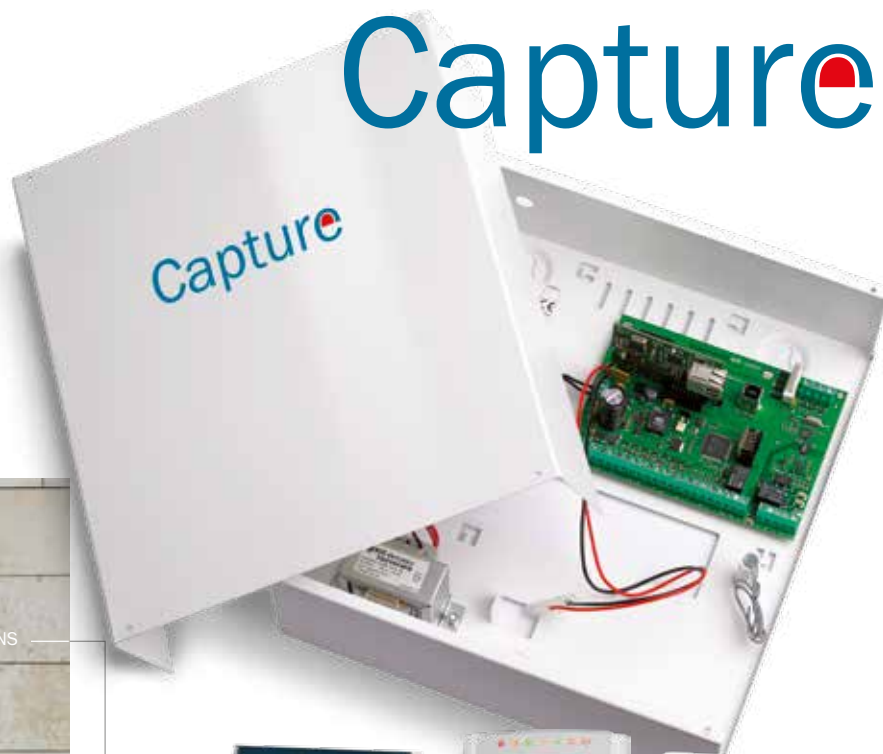

CAPTURE and its APP give you all the safety and freedom you desire!

Thanks to the secure and powerful AVS Cloud technology, with a simple click, using the MyAVSAlarm APP, you can check the status of your alarm system, verify the list of memory events, activate or not the status of the partitions and manage others home automation functions such as, for example, activate lights, shutters, and gate opening.



AVS SERVER CLOUD

The AVS cloud allows a secure and reliable connection, constantly supervising the connection to Internet.



VIDEO VERIFICATIONS

The APP permits the connection of video cameras IP ONVIF S - Mjpeg - RTSP for the video verifications in real time.



PUSH NOTIFICATIONS

The AVS Cloud is able to keep you informed on what is happening to your control panel, sending real time notifications of alarm, failure, login on your mobile.



QUICK ACTION

Simple and quick management of the control panel with the simplifications of the accesses and the activation of quick commands. Your telephone can be becoming a remote control.



SIMPLIFIED SCENARIOS

With only a click, you can manage many functionalities. With this function, it makes simpler also the most complexed commands.



SIMPLE COMMANDS

A smart and simple interface allows you to intuitively access to all the programmed functions of the system.



RS 485 DIGITAL DEVICES

SIRENS TS85 LED HP
BUS OUTDOOR SIRENS RS485

TS85 LED INOX HP

CITY CARBON PLUS HP




AVAILABLE IN
DIFFERENT
MODELS AND
COLOURS



XSAT HP
XSAT HP MINI
DIGITAL EXPANSION

BM 60-120-200 HP
DIGITAL MICROWAVE BARRIER

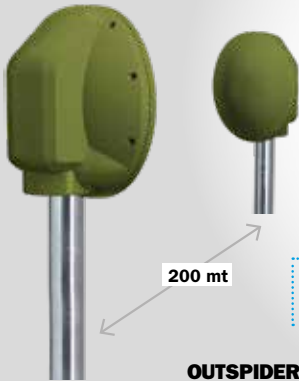

200 mt



OUTSPIDER PA HP
DIGITAL
OUTDOOR
DOUBLE
PASSIVE
DETECTOR



OUTSPIDER DT HP
DIGITAL OUTDOOR
MULTI-CHANNEL
DETECTOR

ONE DT HP
DOUBLE TECH
OUTDOOR
CURTAIN
DETECTOR



ONE PA HP
PASSIVE IR
OUTDOOR
CURTAIN
DETECTOR



JET DT HP PLUS
DUALTECH INDOOR
DIGITAL DETECTOR



THE FLEXIBLE CONTROL PANEL: WIRE & WIRELESS



BIDIRECTIONAL WIRELESS DEVICES

CITY WS 4
LED OUTDOOR
SIREN



X SAT WS4
BIDIRECTIONAL RADIO
EXTENSION MODULE



OUTSPIDER DT WS 4
DOUBLE TECHNOLOGY
OUTDOOR DETECTOR

GHOST WS 4 PLUS
BIDIRECTIONAL
WIRELESS
TRANSMITTER FOR
DOORS AND
WINDOWS



WIC 4 PLUS - WIC 4 MINI PLUS
WIRELESS MAGNETIC CONTACT
DOUBLE CHANNEL WITH
INERTIAL



JET 360 WS 4
INDOOR CEILING
MOUNTING PIR



SD4 WS
INDOOR OPTICAL SMOKE
DETECTOR WIRELESS



*** RPT WS 4**
BI-DIRECTIONAL WIRELESS
REPEATER



JET DT WS 4
INDOOR DOUBLE VOLUMETRIC
TECHNOLOGY DETECTOR



BIP 4 PLUS
BIDIRECTIONAL
REMOTE CONTROL



SPECTRUM DT WS AM 4
DOUBLE TECHNOLOGY
OUTDOOR DETECTOR



ONE PA WS 4
OUTDOOR
CURTAIN
DETECTOR

WING 4 WS
INDOOR CURTAIN DETECTOR



* PRODUCT AVAILABLE SOON

COMMUNICATION INTERFACES & ACCESSORIES.

CAPTURE is able to manage 4/8 partitions / plants with 4 different arming modes and 64/128 user codes, allowing the connection of keypads (max 8). With the integrated PSTN telephone dialer, Capture allows the transmission of digital protocols (CONTACT ID/SIA I/II) on the PSTN or vocal message with **DIGIVOC** (optional module). The optional XGSM module can be installed to integrate the telephone dialer on the GSM channel CAPTURE allows a simple programming both from the keyboard and with the **XWIN** software, through the AVS Cloud.



	CAPTURE 8	CAPTURE 16	CAPTURE 32	CAPTURE 16 M	CAPTURE 32 M	CAPTURE 64 M	CAPTURE 128 M
Maximum keypads number				8			
Maximum readers number	4	4	8	4	8	8	8
Built-in terminal number/ maximum terminal number	8 / 8	8 / 16	8 / 32	8 / 16	8 / 32	8 / 64	8 / 128
Built-in tamper input				1			
RS485 bus number				1			
Maximum number of RS485 terminal extensions including wireless extension	2	4			8		
Maximum sector number	4	4			8		
Number of partial arming /sector				3			
Number of scenario for 8 actions	16	32	64	32	64		
Maximum user number	64		128	64	128		
Weekly timer				16/day			
Event memory				512			
Terminal programming type	Normally closed / normally open/ balanced / double balancing / output (for 4 terminals on main board)						
Built in output number/ maximum output number	3 / 8	3 / 16	3 / 32	3 / 16	3 / 32	3 / 64	3 / 128
Siren output	Exchange relay (C - NC - NO)						
Number of programming profile input				19			
Box size (mm) and battery type	305 x 95 x 275 7 Amp backup battery			375 x 96 x 311 18 Amp backup battery			
Power type	1.2 Amp Transformer + Built-in switching regulator			1.6 Amp Transformer + Built-in switching regulator			
Built-in PSNT interface				Yes			
Numbers in phone-book				16			
Built-in transmission protocols				CONTACT ID / SIA I / II			
Optional transmission protocol				Vocal with DIGIVOC			
Optional transmission interfaces				GSM / GPRS / IP / WIFI			
Built-in transmissions protocols on optional transmission interfaces	CONTACT ID IP / SIA IP / email with EWEB / APP with EWEB / XGSM 485 PRO / KNX / MOD BUS with EWEB			SMS with XGSM/			
Programming interface				Keypad/ USB/ pstn			
Optional programming interfaces				GSM / IP / GPRS / CLOUD			
EN 50131 GRADE (in progress)				EN 50131 GRADE 2			



AVS ELECTRONICS S.p.A.

Via Valsugana, 63 - 35010 Curtarolo (PD) - Italy
Tel. +39 049 9698 411 - Fax +39 049 9698 407

avs@avselectronics.it - www.avselectronics.com