

NVR-E32-4D

Network Video Recorder



قابلیت های کلیدی


- یک عدد 4K HDMI و یک عدد VGA
- پشتیبانی از 4 عدد هارد تا ظرفیت 8 ترابایت برای هر کدام
- قابلیت برگرداندن تصاویر بعد از قطع شبکه
- قابلیت بروزرسانی آنلاین

- پشتیبانی از فرمت های تصویر Ultra265, H.265, H.264
- 32 کانال تصویر ورودی تا رزولوشن 8 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	32-ch	VCA Detection	Face detection, Intrusion detection, Cross Line detection, Audio detection, Human Body detection, People Counting, People flow Counting, Crowd density monitoring, Scene Change detection, Defocus detection, Auto Tracking, Object Left Behind, Object Removed, SIP by IPC
Two-way Audio Input	1-ch, RCA	VCA Search	Face Search, Behavior Search
Incoming bandwidth	160Mbps	SATA	4 SATA interfaces
Outgoing bandwidth	64Mbps	Capacity	Up to 8TB for each disk (The maximum HDD capacity varies with environment temperature)
Remote Users	128	Smart Intrusion Prevention (SIP) by Camera	8-ch
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP	General Alarm	Motion, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection
HDMI/VGA Output	HDMI: 4K (3840x2160) @30, 1920x1080p@60, 1920x1080p@50, 1600x1200@60, 1280x1024@60, 1280x720@60, 1024x768@60 VGA: 1920x1080p@60, 1920x1080p@50, 1280x1024@60, 1280x720@60, 1024x768@60	Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Audio Output	1-ch, RCA	Network Interface	2 RJ-45 10M/100M/1000M self-adaptive Ethernet Interfaces
Audio Compression	6.711A, 6.711U	USB Interface	Rear panel: 1 x USB1, 2.0 x USB3.0 Front panel: 1 x USB2.0
Recording Resolution	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF	RS232	NA
Synchronous Playback	32-ch	RS485	NA
Liveview display	1/4/6/8/9/16/25/36	Alarm In	NA
Corridor Mode Screen	3/4/5/7/9/10/12/16/32	Alarm Out	NA
FTP/Schedule/Event Snapshot	4-ch snapshot, up to D1 resolution	Power Supply	12V DC Power Consumption: ≤ 15W(without HDD)
Decoding format	Ultra 265/H.265/H.264	Working Environment	°10-C ~ + °55C (°14+F ~ °131+F), Humidity ≤ %90 RH(non-condensing)
Live view/ Playback	8MP/5MP/4MP/3MP/1080p/960p/960H/720p/D1/2CIF/CIF	Dimensions (W×D×H)	440mm × 344mm × 50mm (2.0× "13.5 × "17.3")
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p @30, 32 x D1	Weight (without HDD)	≤ 3.15 Kg (6.94 lb)

Dimensions

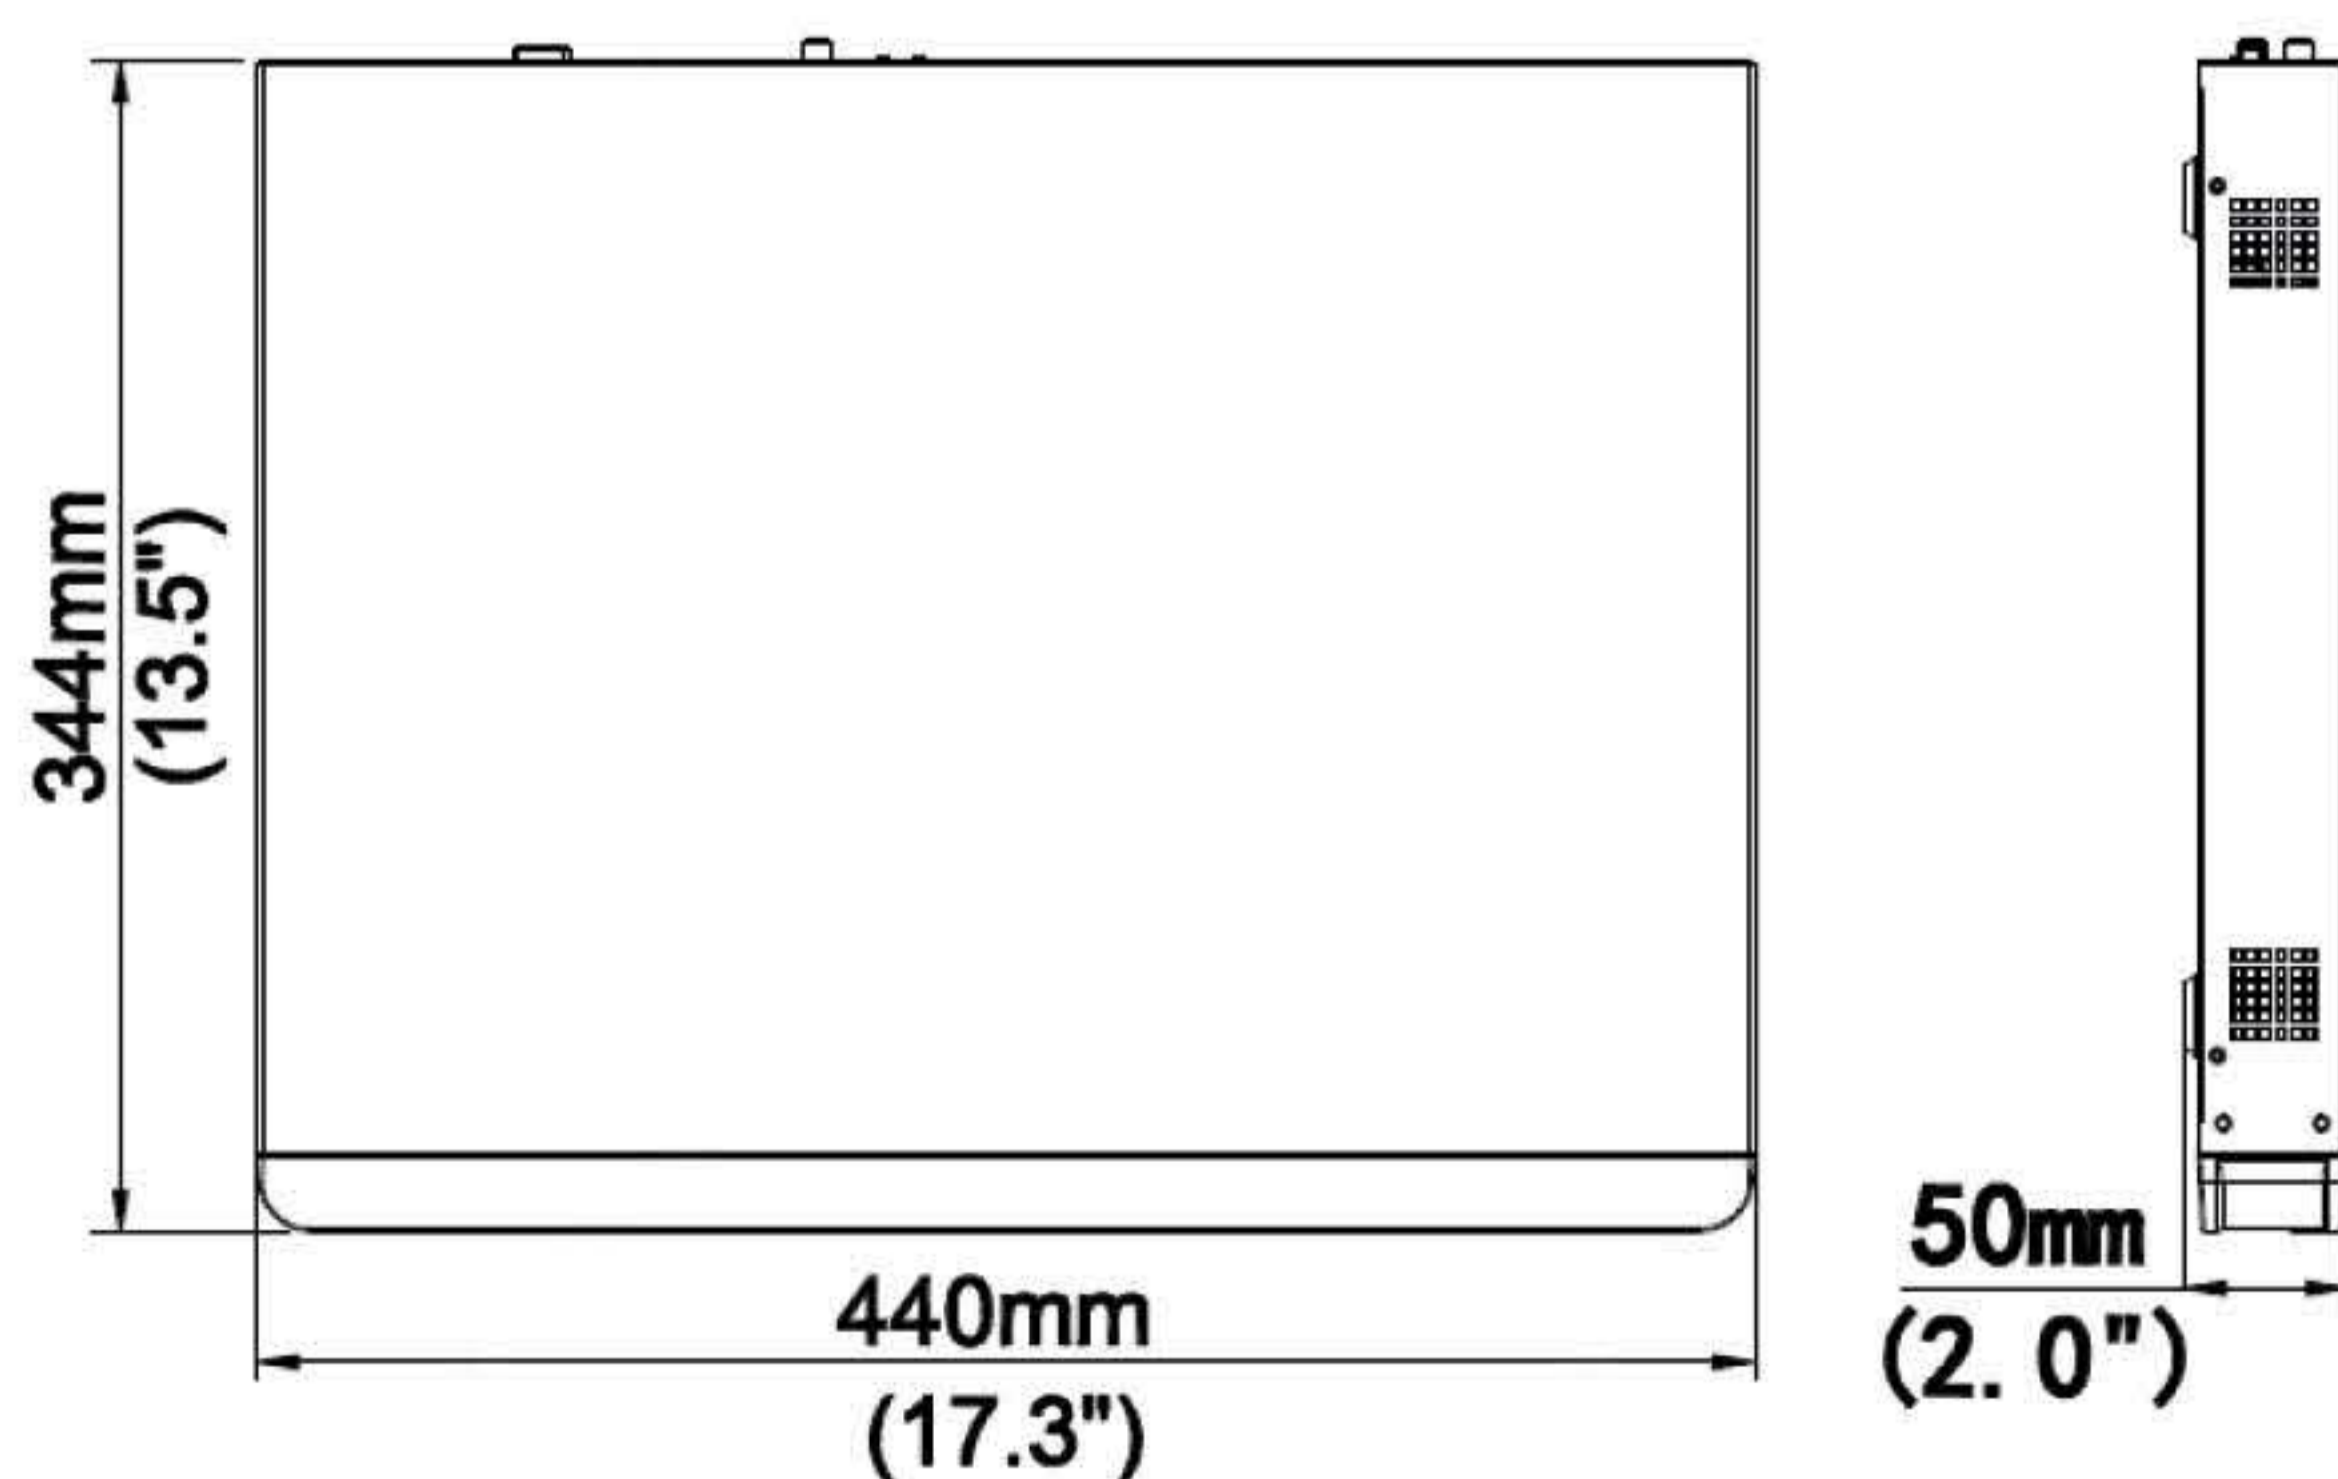

Rear Panel

